

Kährs LVT Flooring

Scratch & Water Resistant Floors



**orchard
timber products**

Part of **National Timber Group**



Kährs

Contents

Click Herringbone Collection: Page 4

Click 6mm Stone Collection: Page 18

Click 6mm Wood Collection: Page 28

XXL Impression Collection: Page 44

Nordic Classic Collection: Page 78





Click Herringbone Collection

The Kährs Luxury Tiles Click collection features a range of narrower and shorter boards – L (left) and R (right) boards – specially designed for herringbone patterns.

They are installed using a high quality Click system to ensure stability.

Please note that these floors don't come with sound reducing backing, as they only measure 5 mm.

They come in six beautiful wood designs, in colours ranging from light to dark.



WHINFELL CHW 120 R

The Kährs Luxury Tiles Click collection feature a range of narrower and shorter boards – L (left) and R (right) boards – specially designed for herringbone patterns. They are installed using high quality Click system to ensure stability. Please note that these floors don't come with sound reducing backing, as they only measure 5 mm. They come in eight beautiful wood designs, in colours ranging from light to dark.

PRODUCT DETAILS

Article Number	LTCHW2004R120
Dimensions	120 x 720 mm
Construction	Click Herringbone
FACTS	
Design	Wood herringbone design
Range	Luxury Tiles
Collection	Click Herringbone Collection
Joint	Click5Gi
Floor heating	Yes
Thickness	5 mm
Installation method	Floating

TECHNICAL PROPERTIES


Reaction To Fire	EN13501-1	Bfl-s1	
Thermal Resistance R-Value	0.032 (m2K/W)		
Residual indentation EN ISO 24343-1	< 0.2 mm (*with underlayment)		
Dimensional stability	EN ISO 23999	< 0.1 %	
Colour fastness	EN ISO 105-B02	≥ 6	
Slip resistance	EN 13893	DS (>0.3)	
Slip resistance	DIN 51130	R10	
Statical electrical propensity	EN 1815	< 2 kV (antistatic)	
Scratch resistance	EN16094	Pass with good results	
Chemical resistance	EN ISO 26987	Pass with good results	
Effect of castor chair	EN 425	Suitable	

Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.



12.02.2024
AB GUSTAF KÄHR | www.kahrs.com | © Kährs 2023

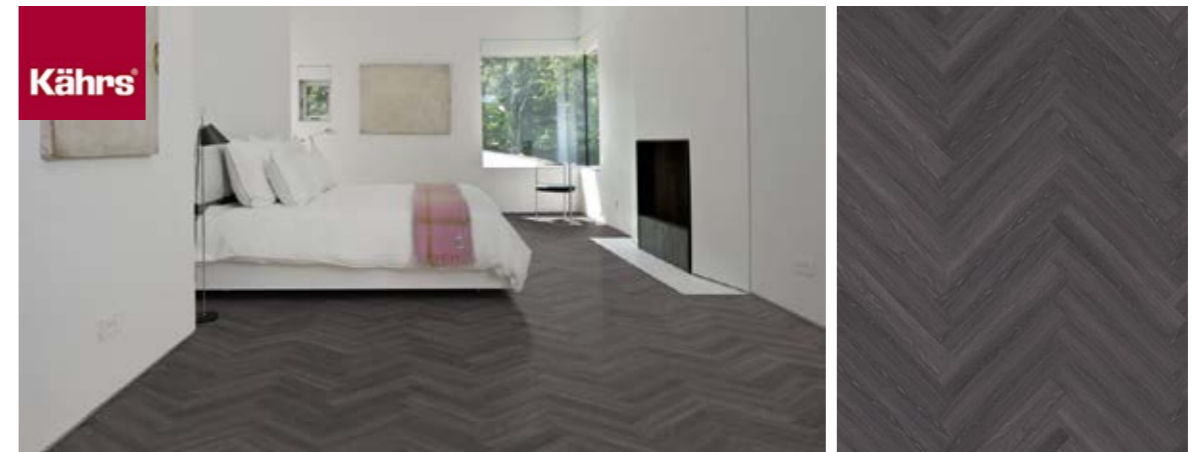

CALDER CHW 120

The Kährs Luxury Tiles Click collection feature a range of narrower and shorter boards – L (left) and R (right) boards – specially designed for herringbone patterns. They are installed using high quality Click system to ensure stability. Please note that these floors don't come with sound reducing backing, as they only measure 5 mm. They come in eight beautiful wood designs, in colours ranging from light to dark.

PRODUCT DETAILS

Article Number	LTCHW2008R120
Dimensions	120 x 720 mm
Construction	Click Herringbone
FACTS	
Design	Wood herringbone design
Range	Luxury Tiles
Collection	Click Herringbone Collection
Joint	Click5Gi
Floor heating	Yes
Thickness	5 mm
Installation method	Floating

TECHNICAL PROPERTIES


Reaction To Fire	EN13501-1	Bfl-s1	
Thermal Resistance R-Value		0.032 (m2K/W)	
Residual indentation EN ISO 24343-1		< 0.2 mm (*with underlayment)	
Dimensional stability	EN ISO 23999	< 0.1 %	
Colour fastness	EN ISO 105-B02	≥ 6	
Slip resistance	EN 13893	DS (>0.3)	
Slip resistance	DIN 51130	R10	
Statical electrical propensity	EN 1815	< 2 kV (antistatic)	
Scratch resistance	EN16094	Pass with good results	
Chemical resistance	EN ISO 26987	Pass with good results	
Effect of castor chair	EN 425	Suitable	

Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.



12.02.2024
AB GUSTAF KÄHR | www.kahrs.com | © Kährs 2023

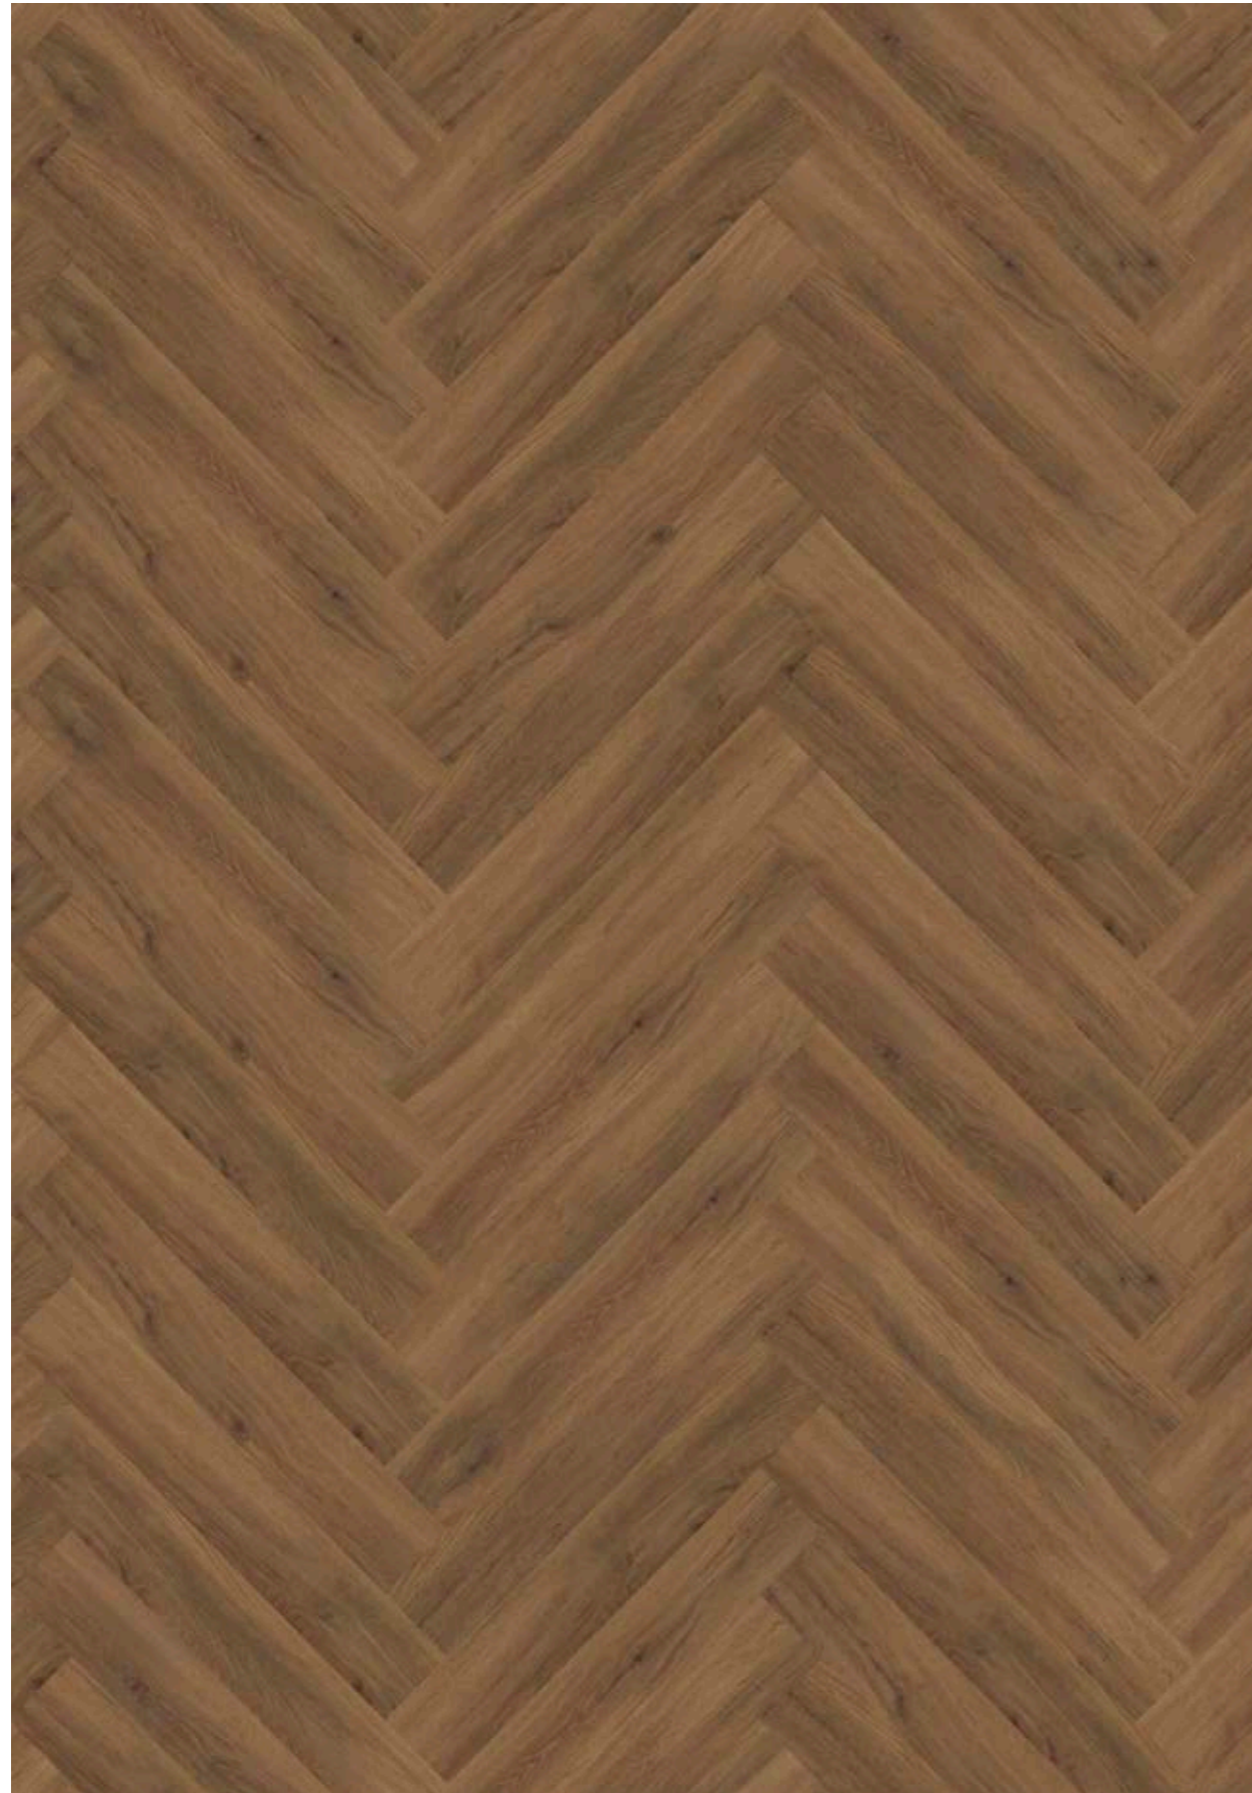

REDWOOD CLICK HERRINGBONE CHW 120 R

The Kährs Luxury Tiles Click collection feature a range of narrower and shorter boards – L (left) and R (right) boards – specially designed for herringbone patterns. They are installed using high quality Click system to ensure stability. Please note that these floors don't come with sound reducing backing, as they only measure 5 mm. They come in eight beautiful wood designs, in colours ranging from light to dark.

PRODUCT DETAILS

Article Number	LTCHW2101R120
Dimensions	120 x 720 mm
Construction	Click Herringbone
FACTS	
Design	Wood herringbone design
Range	Luxury Tiles
Collection	Click Herringbone Collection
Joint	Click5Gi
Floor heating	Yes
Thickness	5 mm
Installation method	Floating

TECHNICAL PROPERTIES

Reaction To Fire	EN13501-1	Bfl-s1	
Thermal Resistance R-Value		0.032 (m2K/W)	
Residual indentation EN ISO 24343-1		< 0.2 mm (*with underlayment)	
Dimensional stability	EN ISO 23999	< 0.1 %	
Colour fastness	EN ISO 105-B02	≥ 6	
Slip resistance	EN 13893	DS (>0.3)	
Slip resistance	DIN 51130	R10	
Statical electrical propensity	EN 1815	< 2 kV (antistatic)	
Scratch resistance	EN16094	Pass with good results	
Chemical resistance	EN ISO 26987	Pass with good results	
Effect of castor chair	EN 425	Suitable	

Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.



12.02.2024
AB GUSTAF KÄHR | www.kahrs.com | © Kährs 2023



BELLUNO CHW 120

The Kährs Luxury Tiles Click collection feature a range of narrower and shorter boards – L (left) and R (right) boards – specially designed for herringbone patterns. They are installed using high quality Click system to ensure stability. Please note that these floors don't come with sound reducing backing, as they only measure 5 mm. They come in eight beautiful wood designs, in colours ranging from light to dark.

PRODUCT DETAILS

Article Number	LTCHW2111R120
Dimensions	120 x 720 mm
Construction	Click Herringbone
FACTS	
Design	Wood herringbone design
Range	Luxury Tiles
Collection	Click Herringbone Collection
Joint	Click5Gi
Floor heating	Yes
Thickness	5 mm
Installation method	Floating

TECHNICAL PROPERTIES

Reaction To Fire	EN13501-1	Bfl-s1
Thermal Resistance R-Value	0.032 (m2K/W)	
Residual indentation EN ISO 24343-1	< 0.2 mm (*with underlayment)	
Dimensional stability	EN ISO 23999	< 0.1 %
Colour fastness	EN ISO 105-B02	≥ 6
Slip resistance	EN 13893	DS (>0.3)
Slip resistance	DIN 51130	R10
Statical electrical propensity	EN 1815	< 2 kV (antistatic)
Scratch resistance	EN16094	Pass with good results
Chemical resistance	EN ISO 26987	Pass with good results
Effect of castor chair	EN 425	Suitable

Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.



12.02.2024
AB GUSTAF KÄHR | www.kahrs.com | © Kährs 2023



TAIGA CHW 120

The Kährs Luxury Tiles Click collection feature a range of narrower and shorter boards – L (left) and R (right) boards – specially designed for herringbone patterns. They are installed using high quality Click system to ensure stability. Please note that these floors don't come with sound reducing backing, as they only measure 5 mm. They come in eight beautiful wood designs, in colours ranging from light to dark.

PRODUCT DETAILS

Article Number	LTCHW2115R120
Dimensions	120 x 720 mm
Construction	Click Herringbone
FACTS	
Design	Wood herringbone design
Range	Luxury Tiles
Collection	Click Herringbone Collection
Joint	Click5Gi
Floor heating	Yes
Thickness	5 mm
Installation method	Floating

TECHNICAL PROPERTIES

Reaction To Fire	EN13501-1	Bfl-s1	
Thermal Resistance R-Value		0.032 (m2K/W)	
Residual indentation EN ISO 24343-1		< 0.2 mm (*with underlayment)	
Dimensional stability	EN ISO 23999	< 0.1 %	
Colour fastness	EN ISO 105-B02	≥ 6	
Slip resistance	EN 13893	DS (>0.3)	
Slip resistance	DIN 51130	R10	
Statical electrical propensity	EN 1815	< 2 kV (antistatic)	
Scratch resistance	EN16094	Pass with good results	
Chemical resistance	EN ISO 26987	Pass with good results	
Effect of castor chair	EN 425	Suitable	

Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.



12.02.2024
AB GUSTAF KÄHR | www.kahrs.com | © Kährs 2023



SAREK CHW 120

The Kährs Luxury Tiles Click collection feature a range of narrower and shorter boards – L (left) and R (right) boards – specially designed for herringbone patterns. They are installed using high quality Click system to ensure stability. Please note that these floors don't come with sound reducing backing, as they only measure 5 mm. They come in eight beautiful wood designs, in colours ranging from light to dark.

PRODUCT DETAILS

Article Number	LTCHW2116L120
Dimensions	120 x 720 mm
Construction	Click Herringbone

FACTS

Design	Wood herringbone design
Range	Luxury Tiles
Collection	Click Herringbone Collection
Joint	Click5Gi
Floor heating	Yes
Thickness	5 mm
Installation method	Floating

TECHNICAL PROPERTIES

Reaction To Fire	EN13501-1	Bfl-s1
Thermal Resistance R-Value	0.032	(m2K/W)
Residual indentation EN ISO 24343-1	< 0.2 mm	(*with underlayment)
Dimensional stability	EN ISO 23999	< 0.1 %
Colour fastness	EN ISO 105-B02	≥ 6
Slip resistance	EN 13893	DS (>0.3)
Slip resistance	DIN 51130	R10
Statical electrical propensity	EN 1815	< 2 kV (antistatic)
Scratch resistance	EN16094	Pass with good results
Chemical resistance	EN ISO 26987	Pass with good results
Effect of castor chair	EN 425	Suitable

Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.



12.02.2024
AB GUSTAF KÄHR | www.kahrs.com | © Kährs 2023



Click 6mm Stone Collection

The Kährs Luxury Tiles Click Collection has been designed for home and public environments that require floors with adhesive-free installation that are both beautiful and tough.

They come in a variety of wood and stone designs. Maximum durability and stability is achieved through the rigid core and the unique 5G locking technology, enabling easy installation by clicking the tiles together.

The Click floors are made from virgin vinyl with a rigid core.

All floors in the collection have IXPE sound reducing backing, effectively controlling noise.

The surface is treated with a strong ceramic coating resistant to wear and tear, scratching and water.

They can be installed on an existing floor, making the Click floors ideal to use in renovation projects or when you want to retain the existing floor.

Just like all our other Luxury Tiles floors, they are phthalate-free.



MATTERHORN CLS 300

The Kährs Luxury Tiles Click floors has been designed for home and public environments that require floors with adhesive-free installation that are both beautiful and tough. They come in a variety of wood and stone designs. Maximum durability and stability is achieved through the rigid core and the unique 5G locking technology, enabling easy installation by clicking the tiles together. The Click floors are made from virgin vinyl with a rigid core. All floors in the collection have IXPE sound reducing backing, effectively controlling noise. The surface is treated with a strong ceramic coating resistant to wear and tear, scratching and water. They can be installed on an existing floor, making the Click floors ideal to use in renovation projects or when you want to retain the existing floor. Just like all our other Luxury Tiles floors, they are phthalate-free.

PRODUCT DETAILS

Article Number	LTCLS3004-300
Dimensions	300 x 600 mm
Weight per Package	17.6 kg
Area per Package	1.8 m ²
Area per pallet	86.4 m ²
Construction	Click 6 mm

FACTS

Design	Stone design
Range	Luxury Tiles
Collection	Click 6 mm Stone Collection
Joint	Click5G
Floor heating	Yes

TECHNICAL PROPERTIES

Application	EN ISO 10874	23/33/42	
Effect of furniture leg	EN ISO 16581	No visible damage/Change	
Reaction To Fire	EN13501-1	Bfl-s1	
Thermal Resistance R-Value		0.035 (m2K/W)	
Residual indentation EN ISO 24343-1		< 0.2 mm (*with underlayment)	
Dimensional stability	EN ISO 23999	< 0.1 %	
Colour fastness	EN ISO 105-B02	≥ 6	
Slip resistance	EN 13893	DS (>0.3)	
Slip resistance	DIN 51130	R10	
Statical electrical propensity	EN 1815	< 2 kV (antistatic)	
Scratch resistance	EN16094	Pass with good results	

Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.



12.02.2024
AB GUSTAF KÄHR | www.kahrs.com | © Kährs 2023



SCHWARZHORN CLS 300

The Kährs Luxury Tiles Click floors has been designed for home and public environments that require floors with adhesive-free installation that are both beautiful and tough. They come in a variety of wood and stone designs. Maximum durability and stability is achieved through the rigid core and the unique 5G locking technology, enabling easy installation by clicking the tiles together. The Click floors are made from virgin vinyl with a rigid core. All floors in the collection have IXPE sound reducing backing, effectively controlling noise. The surface is treated with a strong ceramic coating resistant to wear and tear, scratching and water. They can be installed on an existing floor, making the Click floors ideal to use in renovation projects or when you want to retain the existing floor. Just like all our other Luxury Tiles floors, they are phthalate-free.

PRODUCT DETAILS

Article Number	LTCLS3008-300
Dimensions	300 x 600 mm
Weight per Package	17.6 kg
Area per Package	1.8 m ²
Area per pallet	86.4 m ²
Construction	Click 6 mm

FACTS

Design	Stone design
Range	Luxury Tiles
Collection	Click 6 mm Stone Collection
Joint	Click5G
Floor heating	Yes

TECHNICAL PROPERTIES

Application	EN ISO 10874	23/33/42	
Effect of furniture leg	EN ISO 16581	No visible damage/Change	
Reaction To Fire	EN13501-1	Bfl-s1	
Thermal Resistance R-Value		0.035 (m2K/W)	
Residual indentation EN ISO 24343-1		< 0.2 mm (*with underlayment)	
Dimensional stability	EN ISO 23999	< 0.1 %	
Colour fastness	EN ISO 105-B02	≥ 6	
Slip resistance	EN 13893	DS (>0.3)	
Slip resistance	DIN 51130	R10	
Statical electrical propensity	EN 1815	< 2 kV (antistatic)	
Scratch resistance	EN16094	Pass with good results	

Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.



12.02.2024
AB GUSTAF KÄHR | www.kahrs.com | © Kährs 2023

1



MAKALU CLS 300

The Kährs Luxury Tiles Click floors has been designed for home and public environments that require floors with adhesive-free installation that are both beautiful and tough. They come in a variety of wood and stone designs. Maximum durability and stability is achieved through the rigid core and the unique 5G locking technology, enabling easy installation by clicking the tiles together. The Click floors are made from virgin vinyl with a rigid core. All floors in the collection have IXPE sound reducing backing, effectively controlling noise. The surface is treated with a strong ceramic coating resistant to wear and tear, scratching and water. They can be installed on an existing floor, making the Click floors ideal to use in renovation projects or when you want to retain the existing floor. Just like all our other Luxury Tiles floors, they are phthalate-free.

PRODUCT DETAILS

Article Number	LTCLS3007-300
Dimensions	300 x 600 mm
Weight per Package	17.6 kg
Area per Package	1.8 m ²
Area per pallet	86.4 m ²
Construction	Click 6 mm

FACTS

Design	Stone design
Range	Luxury Tiles
Collection	Click 6 mm Stone Collection
Joint	Click5G
Floor heating	Yes

TECHNICAL PROPERTIES

Application	EN ISO 10874	23/33/42	
Effect of furniture leg	EN ISO 16581	No visible damage/Change	
Reaction To Fire	EN13501-1	Bfl-s1	
Thermal Resistance R-Value		0.035 (m2K/W)	
Residual indentation EN ISO 24343-1		< 0.2 mm (*with underlayment)	
Dimensional stability	EN ISO 23999	< 0.1 %	
Colour fastness	EN ISO 105-B02	≥ 6	
Slip resistance	EN 13893	DS (>0.3)	
Slip resistance	DIN 51130	R10	
Statical electrical propensity	EN 1815	< 2 kV (antistatic)	
Scratch resistance	EN16094	Pass with good results	

Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.



12.02.2024
AB GUSTAF KÄHR | www.kahrs.com | © Kährs 2023



LUCANIA CLS 300

The Kährs Luxury Tiles Click floors has been designed for home and public environments that require floors with adhesive-free installation that are both beautiful and tough. They come in a variety of wood and stone designs. Maximum durability and stability is achieved through the rigid core and the unique 5G locking technology, enabling easy installation by clicking the tiles together. The Click floors are made from virgin vinyl with a rigid core. All floors in the collection have IXPE sound reducing backing, effectively controlling noise. The surface is treated with a strong ceramic coating resistant to wear and tear, scratching and water. They can be installed on an existing floor, making the Click floors ideal to use in renovation projects or when you want to retain the existing floor. Just like all our other Luxury Tiles floors, they are phthalate-free.

PRODUCT DETAILS

Article Number	LTCLS3001-300
Dimensions	300 x 600 mm
Weight per Package	17.6 kg
Area per Package	1.8 m ²
Area per pallet	86.4 m ²
Construction	Click 6 mm

FACTS

Design	Stone design
Range	Luxury Tiles
Collection	Click 6 mm Stone Collection
Joint	Click5G
Floor heating	Yes

TECHNICAL PROPERTIES

Application	EN ISO 10874	23/33/42	
Effect of furniture leg	EN ISO 16581	No visible damage/Change	
Reaction To Fire	EN13501-1	Bfl-s1	
Thermal Resistance R-Value		0.035 (m2K/W)	
Residual indentation EN ISO 24343-1		< 0.2 mm (*with underlayment)	
Dimensional stability	EN ISO 23999	< 0.1 %	
Colour fastness	EN ISO 105-B02	≥ 6	
Slip resistance	EN 13893	DS (>0.3)	
Slip resistance	DIN 51130	R10	
Statical electrical propensity	EN 1815	< 2 kV (antistatic)	
Scratch resistance	EN16094	Pass with good results	

Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.



12.02.2024
AB GUSTAF KÄHR | www.kahrs.com | © Kährs 2023



Click 6mm Wood Collection

The Kährs Luxury Tiles Click Collection has been designed for home and public environments that require floors with adhesive-free installation that are both beautiful and tough.

They come in a variety of wood and stone designs. Maximum durability and stability is achieved through the rigid core and the unique 5G locking technology, enabling easy installation by clicking the tiles together.

The Click floors are made from virgin vinyl with a rigid core.

All floors in the collection have IXPE sound reducing backing, effectively controlling noise.

The surface is treated with a strong ceramic coating resistant to wear and tear, scratching and water.

They can be installed on an existing floor, making the Click floors ideal to use in renovation projects or when you want to retain the existing floor.

Just like all our other Luxury Tiles floors, they are phthalate-free.



TIVEDEN CLW 218

Kährs Luxury Tiles Click floor Tiveden has deep brown nuances inspired by the bark of pines, adding a touch of elegance to any interior. The grey undertones enhance the calm, subtle wood design grading.

PRODUCT DETAILS		FACTS		TECHNICAL PROPERTIES		
Article Number	LTCLW2005-218	Design	Wood design	Application	EN ISO 10874	23/33/42
Dimensions	218 x 1210 mm	Range	Luxury Tiles	Effect of furniture leg	EN ISO 16581	No visible damage/Change
Weight per Package	20.6 kg	Collection	Breeze Collection	Reaction To Fire	EN13501- Bfl-s1	1
Area per Package	2.1 m ²	Joint	Click5G	Thermal Resistance R-Value		0.035 (m2K/W)
Area per pallet	84.5 m ²	Floor heating	Yes	Residual indentation EN ISO 24343-1		< 0.2 mm (*with underlayment)
Construction	Click 6 mm	Backside material	IXPE Sound reducing backing	Dimensional stability	EN ISO 23999	< 0.1 %
DETAIL DESCRIPTION		Thickness	6 mm	Colour fastness	EN ISO 105-B02	≥ 6
For adhesive-free installation in homes and public spaces. Maximum durability and stability through the rigid core and the unique 5G locking system, enabling easy installation by clicking the tiles together. Made from virgin vinyl, they are phthalate-free and have IXPE sound reducing backing, effectively controlling noise. Surface treated with a strong ceramic coating resistant to wear, scratching and water. Can be installed on an existing floor, ideal for renovation projects.		Installation method	Floating	Slip resistance	EN 13893 DS (>0.3)	
				Slip resistance	DIN 51130	R10
				Statical electrical propensity	EN 1815	< 2 kV (antistatic)
				Scratch resistance	EN16094	Pass with good results

Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.



12.02.2024
AB GUSTAF KÄHR | www.kahrs.com | © Kährs 2023



FONTIN CLW 218

Kährs Luxury Tiles Click floor Fontin has been inspired by the warm brown and golden tones of a calm summer sunset. The truly authentic natural impression is enhanced by a subtle wood design grading, making Fontin a stunning, timeless floor.

PRODUCT DETAILS

Article Number	LTCLW2009-218
Dimensions	218 x 1210 mm
Weight per Package	20.6 kg
Area per Package	2.1 m ²
Area per pallet	84.4 m ²
Construction	Click 6 mm

DETAIL DESCRIPTION

For adhesive-free installation in homes and public spaces. Maximum durability and stability through the rigid core and the unique 5G locking system, enabling easy installation by clicking the tiles together. Made from virgin vinyl, they are phthalate-free and have IXPE sound reducing backing, effectively controlling noise. Surface treated with a strong ceramic coating resistant to wear, scratching and water. Can be installed on an existing floor, ideal for renovation projects.

FACTS

Design	Wood design
Range	Luxury Tiles
Collection	Breeze Collection
Floor heating	Yes

TECHNICAL PROPERTIES

Application	EN ISO 10874	23/33/42	
Effect of furniture leg	EN ISO 16581	No visible damage/Change	
Reaction To Fire	EN13501-1	Bfl-s1	
Thermal Resistance R-Value		0.035 (m2K/W)	
Residual indentation EN ISO 24343-1		< 0.2 mm (*with underlayment)	
Dimensional stability	EN ISO 23999	< 0.1 %	
Colour fastness	EN ISO 105-B02	≥ 6	
Slip resistance	EN 13893	DS (>0.3)	
Slip resistance	DIN 51130	R10	
Statical electrical propensity	EN 1815	< 2 kV (antistatic)	
Scratch resistance	EN16094	Pass with good results	

Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.



12.02.2024
AB GUSTAF KÄHR | www.kahrs.com | © Kährs 2023



HANMER CLW 218

Kährs Luxury Tiles Click floor Hanmer combines the colours of natural oak wood with nuances from warm sand, Hanmer has a truly authentic, natural look. With warm nuances and a calm grade wood design, the floor effortlessly creates a relaxing atmosphere in any interior.

PRODUCT DETAILS		FACTS		TECHNICAL PROPERTIES		
Article Number	LTCLW2010-218	Design	Wood design	Application	EN ISO 23/33/42 10874	
Dimensions	218 x 1210 mm	Range	Luxury Tiles	Effect of furniture leg	EN ISO 16581 No visible damage/Change	
Weight per Package	20.6 kg	Collection	Breeze Collection	Reaction To Fire	EN13501- Bfl-s1 1	
Area per Package	2.1 m ²	Joint	Click5G	Thermal Resistance R-Value	0.035 (m2K/W)	
Area per pallet	84.4 m ²	Floor heating	Yes	Residual indentation EN ISO 24343-1	< 0.2 mm (*with underlayment)	
Construction	Click 6 mm	Backside material	IXPE Sound reducing backing	Dimensional stability	EN ISO 23999 < 0.1 %	
DETAIL DESCRIPTION		Thickness	6 mm	Colour fastness	EN ISO 105-B02 ≥ 6	
For adhesive-free installation in homes and public spaces. Maximum durability and stability through the rigid core and the unique 5G locking system, enabling easy installation by clicking the tiles together. Made from virgin vinyl, they are phthalate-free and have IXPE sound reducing backing, effectively controlling noise. Surface treated with a strong ceramic coating resistant to wear, scratching and water. Can be installed on an existing floor, ideal for renovation projects.		Installation method	Floating	Slip resistance	EN 13893 DS (>0.3)	
				Slip resistance	DIN 51130 R10	
				Statical electrical propensity	EN 1815 < 2 kV (antistatic)	
				Scratch resistance	EN16094 Pass with good results	

Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.



12.02.2024
AB GUSTAF KÄHR | www.kahrs.com | © Kährs 2023
1



SAXON CLW 218

Kährs Luxury Tiles Click floor Saxon has dark and deep shades of brown and grey, combined with detailed grain definition, knots and cracks, creating a characterful yet elegant floor.

PRODUCT DETAILS		FACTS		TECHNICAL PROPERTIES		
Article Number	LTCLW2109-218	Design	Wood design	Application	EN ISO 10874	23/33/42
Dimensions	218 x 1210 mm	Range	Luxury Tiles	Effect of furniture leg	EN ISO 16581	No visible damage/Change
Weight per Package	20.6 kg	Collection	Nature Collection	Reaction To Fire	EN13501- Bfl-s1	1
Area per Package	2.1 m ²	Joint	Click5G	Thermal Resistance R-Value	0.035 (m2K/W)	
Area per pallet	84.5 m ²	Floor heating	Yes	Residual indentation EN ISO 24343-1	< 0.2 mm (*with underlayment)	
Construction	Click 6 mm	Backside material	IXPE Sound reducing backing	Dimensional stability	EN ISO 23999	< 0.1 %
DETAIL DESCRIPTION		Thickness	6 mm	Colour fastness	EN ISO 105-B02	≥ 6
For adhesive-free installation in homes and public spaces. Maximum durability and stability through the rigid core and the unique 5G locking system, enabling easy installation by clicking the tiles together. Made from virgin vinyl, they are phthalate-free and have IXPE sound reducing backing, effectively controlling noise. Surface treated with a strong ceramic coating resistant to wear, scratching and water. Can be installed on an existing floor, ideal for renovation projects.		Installation method	Floating	Slip resistance	EN 13893 DS (>0.3)	
				Slip resistance	DIN 51130	R10
				Statical electrical propensity	EN 1815	< 2 kV (antistatic)
				Scratch resistance	EN16094	Pass with good results

Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.



12.02.2024
AB GUSTAF KÄHR | www.kahrs.com | © Kährs 2023



OULANKA CLW 218

Kährs Luxury Tiles Click floor Oulanka was inspired by the light gold and brown tones of wheat fields swaying in the wind, one of our most popular LVT floors. Authentic wood colours and realistic characterful features such as knots and cracks enhance the natural look of this floor.


PRODUCT DETAILS		FACTS		TECHNICAL PROPERTIES		
Article Number	LTCLW2110-218	Design	Wood design	Application	EN ISO 23/33/42 10874	
Dimensions	218 x 1210 mm	Range	Luxury Tiles	Effect of furniture leg	EN ISO 16581 No visible damage/Change	
Weight per Package	20.6 kg	Collection	Nature Collection	Reaction To Fire	EN13501- Bfl-s1 1	
Area per Package	2.1 m ²	Joint	Click5G	Thermal Resistance R-Value	0.035 (m2K/W)	
Area per pallet	84.5 m ²	Floor heating	Yes	Residual indentation EN ISO 24343-1	< 0.2 mm (*with underlayment)	
Construction	Click 6 mm	Warranty	30 years residential/15 years commercial	Dimensional stability	EN ISO 23999 < 0.1 %	
DETAIL DESCRIPTION		Thickness	6 mm	Colour fastness	EN ISO 105-B02 ≥ 6	
For adhesive-free installation in homes and public spaces. Maximum durability and stability through the rigid core and the unique 5G locking system, enabling easy installation by clicking the tiles together. Made from virgin vinyl, they are phthalate-free and have IXPE sound reducing backing, effectively controlling noise. Surface treated with a strong ceramic coating resistant to wear, scratching and water. Can be installed on an existing floor, ideal for renovation projects.		Installation method	Floating	Slip resistance	EN 13893 DS (>0.3)	
				Slip resistance	DIN 51130 R10	
				Statical electrical propensity	EN 1815 < 2 kV (antistatic)	
				Scratch resistance	EN16094 Pass with good results	

Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.



12.02.2024
AB GUSTAF KÄHR | www.kahrs.com | © Kährs 2023

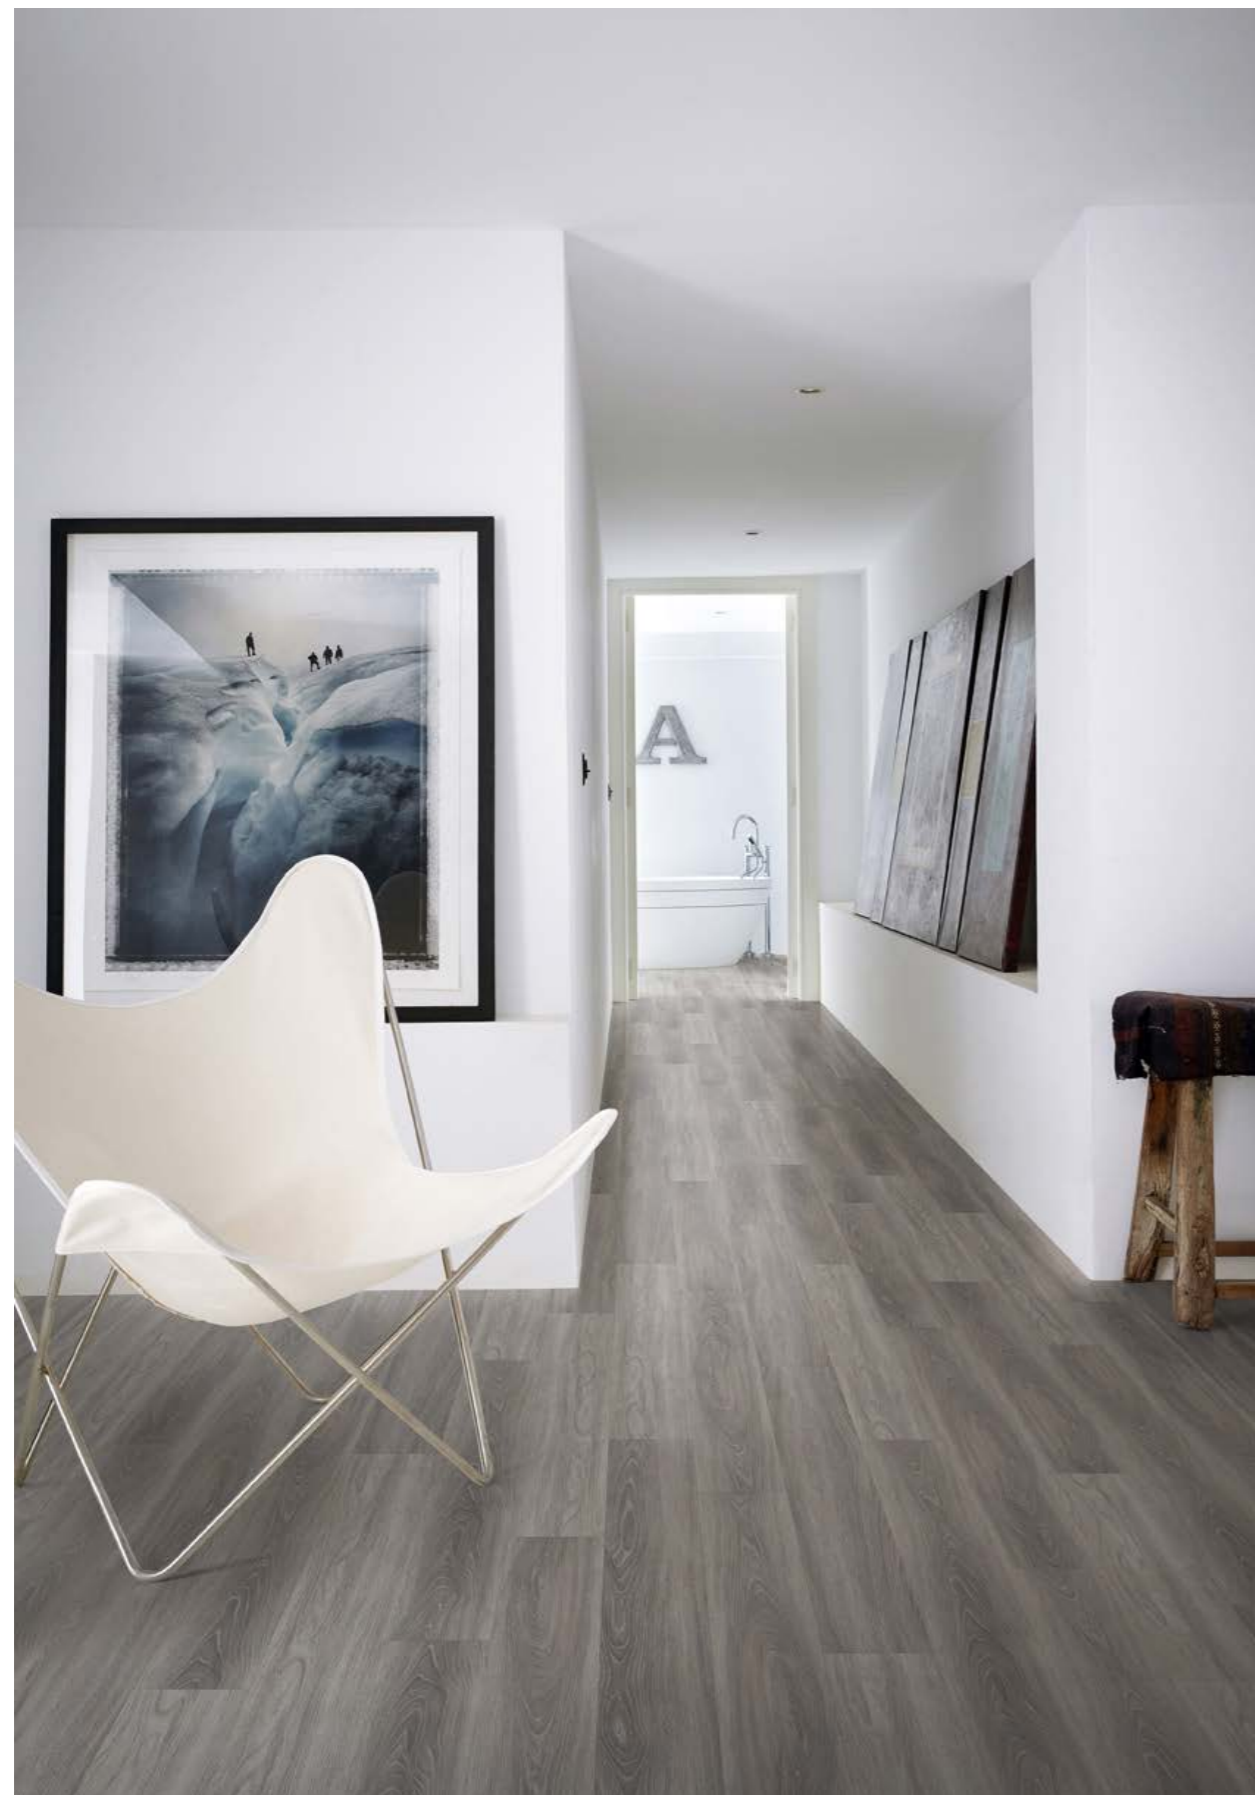

WENTWOOD CLW 218

Kährs Luxury Tiles Click floor Wentwood was inspired by deep dark driftwood, featuring variations of grey and brown. With a calm wood graining design, the floor adds a touch of luxury to contemporary and traditional interiors.

PRODUCT DETAILS		FACTS		TECHNICAL PROPERTIES		
Article Number	LTCLW2007-218	Design	Wood design	Application	EN ISO 23/33/42 10874	
Dimensions	218 x 1210 mm	Range	Luxury Tiles	Effect of furniture leg	EN ISO 16581 No visible damage/Change	
Weight per Package	20.6 kg	Collection	Breeze Collection	Reaction To Fire	EN13501- Bfl-s1 1	
Area per Package	2.1 m ²	Joint	Click5G	Thermal Resistance R-Value	0.035 (m2K/W)	
Area per pallet	84.5 m ²	Floor heating	Yes	Residual indentation EN ISO 24343-1	< 0.2 mm (*with underlayment)	
Construction	Click 6 mm	Backside material	IXPE Sound reducing backing	Dimensional stability	EN ISO 23999 < 0.1 %	
DETAIL DESCRIPTION		Thickness	6 mm	Colour fastness	EN ISO 105-B02 ≥ 6	
For adhesive-free installation in homes and public spaces. Maximum durability and stability through the rigid core and the unique 5G locking system, enabling easy installation by clicking the tiles together. Made from virgin vinyl, they are phthalate-free and have IXPE sound reducing backing, effectively controlling noise. Surface treated with a strong ceramic coating resistant to wear, scratching and water. Can be installed on an existing floor, ideal for renovation projects.		Installation method	Floating	Slip resistance	EN 13893 DS (>0.3)	
				Slip resistance	DIN 51130 R10	
				Statical electrical propensity	EN 1815 < 2 kV (antistatic)	
				Scratch resistance	EN16094 Pass with good results	

Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.



12.02.2024
AB GUSTAF KÄHR | www.kahrs.com | © Kährs 2023



WHINFELL CLW 218

Kährs Luxury Tiles Click floor Whinfall has a spectrum of warm brown and grey tones inspired by cliffs of the archipelago. Whinfall, with its calm wood design and luxurious, natural impression gives any space a grand makeover.

PRODUCT DETAILS		FACTS		TECHNICAL PROPERTIES		
Article Number	LTCLW2004-218	Design	Wood design	Application	EN ISO 10874	23/33/42
Dimensions	218 x 1210 mm	Range	Luxury Tiles	Effect of furniture leg	EN ISO 16581	No visible damage/Change
Weight per Package	20.6 kg	Collection	Breeze Collection	Reaction To Fire	EN13501- Bfl-s1	1
Area per Package	2.1 m ²	Joint	Click5G	Thermal Resistance R-Value		0.035 (m2K/W)
Area per pallet	84.5 m ²	Floor heating	Yes	Residual indentation EN ISO 24343-1		< 0.2 mm (*with underlayment)
Construction	Click 6 mm	Warranty	30 years residential/15 years commercial	Dimensional stability	EN ISO 23999	< 0.1 %
DETAIL DESCRIPTION		Thickness	6 mm	Colour fastness	EN ISO 105-B02	≥ 6
For adhesive-free installation in homes and public spaces. Maximum durability and stability through the rigid core and the unique 5G locking system, enabling easy installation by clicking the tiles together. Made from virgin vinyl, they are phthalate-free and have IXPE sound reducing backing, effectively controlling noise. Surface treated with a strong ceramic coating resistant to wear, scratching and water. Can be installed on an existing floor, ideal for renovation projects.		Installation method	Floating	Slip resistance	EN 13893 DS (>0.3)	
				Slip resistance	DIN 51130	R10
				Statical electrical propensity	EN 1815	< 2 kV (antistatic)
				Scratch resistance	EN16094	Pass with good results

Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.



12.02.2024
AB GUSTAF KÄHR | www.kahrs.com | © Kährs 2023



XXL Impression Collection

The Kährs XXL Impression Collection has been designed for home and public environments that require floors with adhesive-free installation that are both beautiful and tough. They come in a variety of wood and stone designs.

Maximum durability and stability is achieved through the rigid core and the unique 5G locking technology, enabling easy installation by clicking the tiles together.

The Click floors are made from virgin vinyl with a rigid core.

All floors in the collection have IXPE sound reducing backing, effectively controlling noise.

The surface is treated with a strong ceramic coating resistant to wear and tear, scratching and water.

They can be installed on an existing floor, making the XXL floors ideal to use in renovation projects or when you want to retain the existing floor.

Just like all our other Luxury Tiles floors, they are phthalate-free.



GROSSGLOCKNER CLS 457

The Kährs Luxury Tiles Click floors has been designed for home and public environments that require floors with adhesive-free installation that are both beautiful and tough. They come in a variety of wood and stone designs. Maximum durability and stability is achieved through the rigid core and the unique 5G locking technology, enabling easy installation by clicking the tiles together. The Click floors are made from virgin vinyl with a rigid core. All floors in the collection have IXPE sound reducing backing, effectively controlling noise. The surface is treated with a strong ceramic coating resistant to wear and tear, scratching and water. They can be installed on an existing floor, making the Click floors ideal to use in renovation projects or when you want to retain the existing floor. Just like all our other Luxury Tiles floors, they are phthalate-free.

PRODUCT DETAILS

Article Number	LTCLS3002-457
Dimensions	457 x 914.4 mm
Weight per Package	24.7 kg
Area per Package	2.51 m ²
Area per pallet	100.4 m ²
Construction	Click 6 mm Impression

FACTS

Design	Stone design
Range	Luxury Tiles
Collection	Impression Stone Collection
Joint	Click5G
Floor heating	Yes

TECHNICAL PROPERTIES

Application	EN ISO 10874	23/33/42	
Effect of furniture leg	EN ISO 16581	No visible damage/Change	
Reaction To Fire	EN13501-1	Bfl-s1	
Thermal Resistance R-Value		0.035 (m2K/W)	
Residual indentation EN ISO 24343-1		< 0.2 mm (*with underlayment)	
Dimensional stability	EN ISO 23999	< 0.1 %	
Colour fastness	EN ISO 105-B02	≥ 6	
Slip resistance	EN 13893	DS (>0.3)	
Slip resistance	DIN 51130	R10	
Statical electrical propensity	EN 1815	< 2 kV (antistatic)	
Scratch resistance	EN16094	Pass with good results	

Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.



12.02.2024
AB GUSTAF KÄHR | www.kahrs.com | © Kährs 2023



KILIMANJARO CLS 457

The Kährs Luxury Tiles Click floors has been designed for home and public environments that require floors with adhesive-free installation that are both beautiful and tough. They come in a variety of wood and stone designs. Maximum durability and stability is achieved through the rigid core and the unique 5G locking technology, enabling easy installation by clicking the tiles together. The Click floors are made from virgin vinyl with a rigid core. All floors in the collection have IXPE sound reducing backing, effectively controlling noise. The surface is treated with a strong ceramic coating resistant to wear and tear, scratching and water. They can be installed on an existing floor, making the Click floors ideal to use in renovation projects or when you want to retain the existing floor. Just like all our other Luxury Tiles floors, they are phthalate-free.

PRODUCT DETAILS

Article Number	LTCLS3003-457
Dimensions	457 x 914.4 mm
Weight per Package	24.7 kg
Area per Package	2.51 m ²
Area per pallet	100.4 m ²
Construction	Click 6 mm Impression

FACTS

Design	Stone design
Range	Luxury Tiles
Collection	Impression Stone Collection
Joint	Click5G
Floor heating	Yes

TECHNICAL PROPERTIES


Application	EN ISO 10874	23/33/42	
Effect of furniture leg	EN ISO 16581	No visible damage/Change	
Reaction To Fire	EN13501-1	Bfl-s1	
Thermal Resistance R-Value		0.035 (m2K/W)	
Residual indentation EN ISO 24343-1		< 0.2 mm (*with underlayment)	
Dimensional stability	EN ISO 23999	< 0.1 %	
Colour fastness	EN ISO 105-B02	≥ 6	
Slip resistance	EN 13893	DS (>0.3)	
Slip resistance	DIN 51130	R10	
Statical electrical propensity	EN 1815	< 2 kV (antistatic)	
Scratch resistance	EN16094	Pass with good results	

Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.



12.02.2024
AB GUSTAF KÄHR | www.kahrs.com | © Kährs 2023

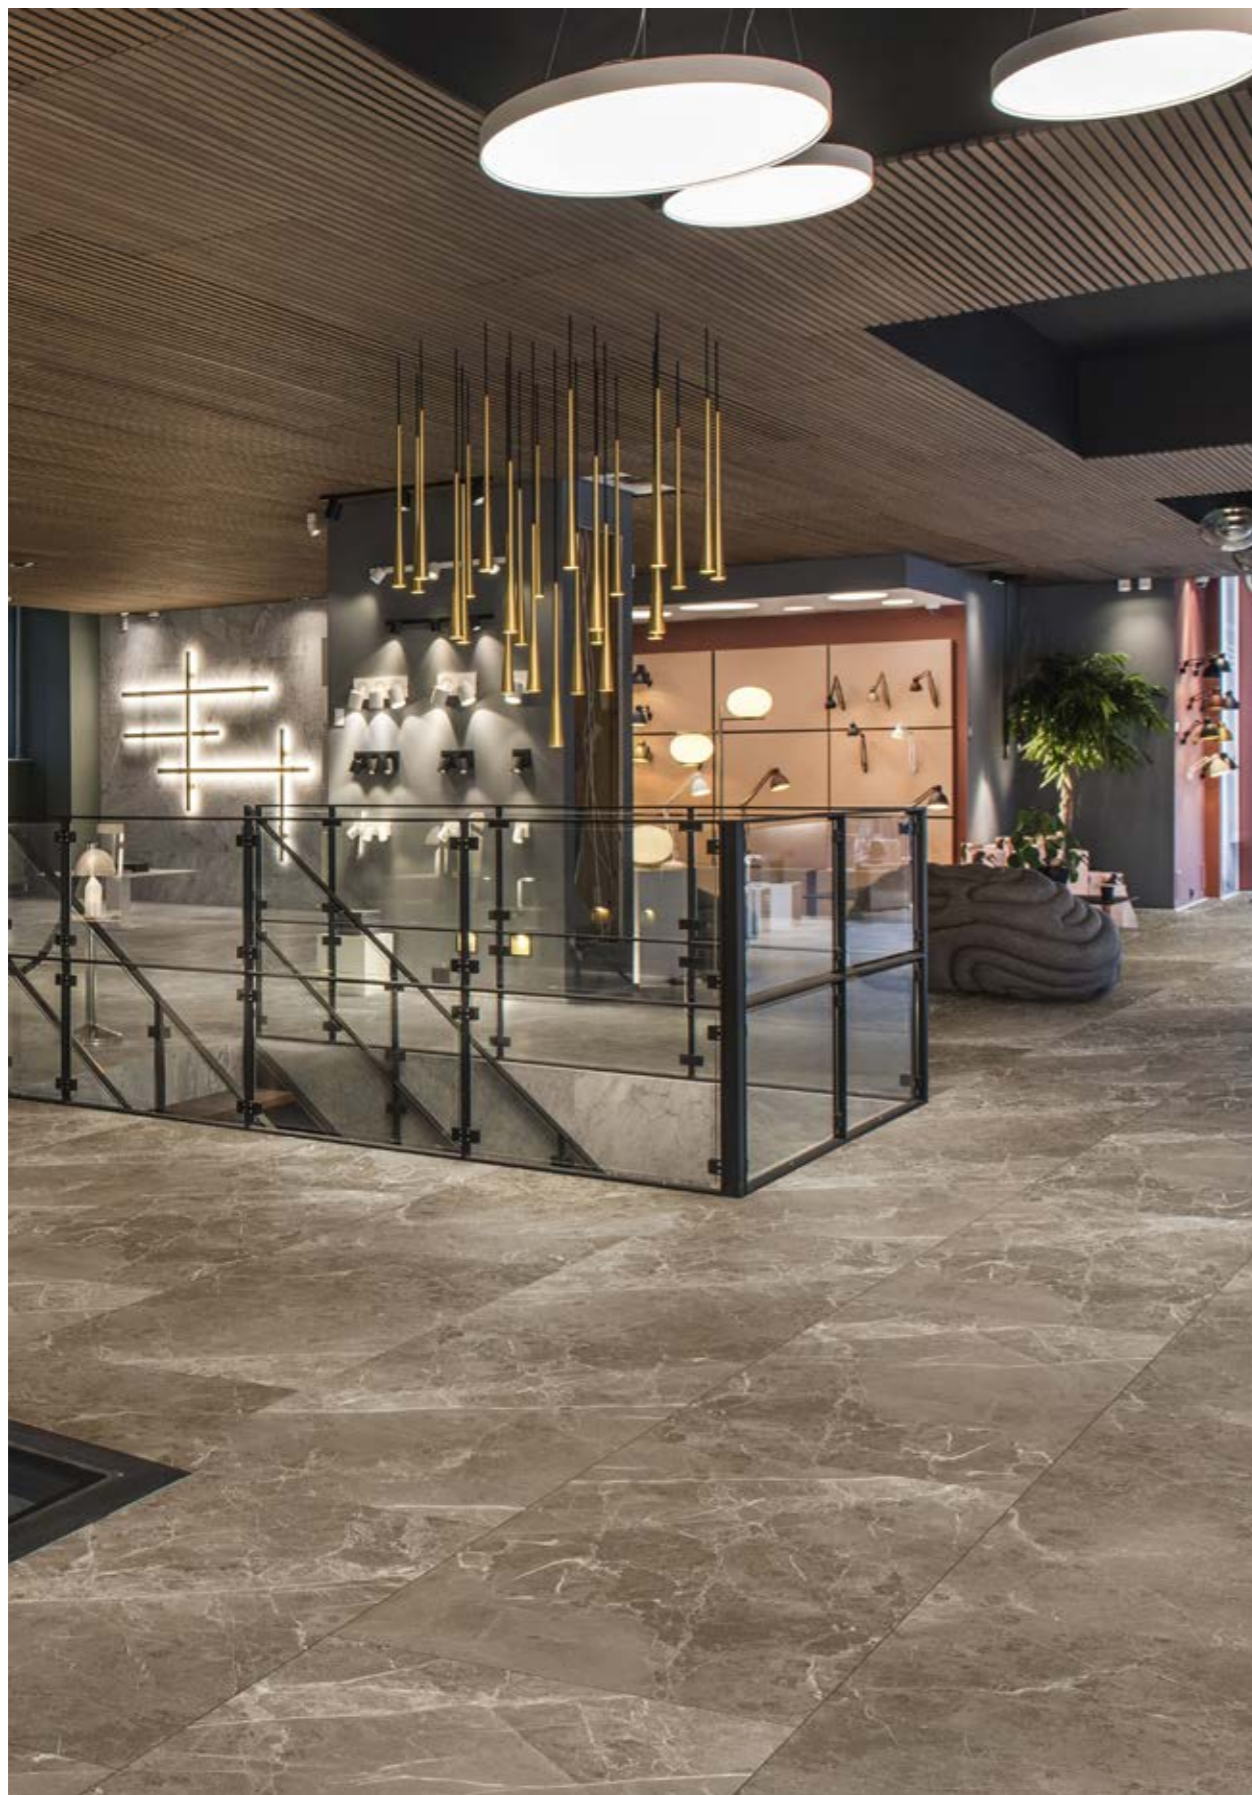

ULTAR CLS 457

The Kährs Luxury Tiles Click floors has been designed for home and public environments that require floors with adhesive-free installation that are both beautiful and tough. They come in a variety of wood and stone designs. Maximum durability and stability is achieved through the rigid core and the unique 5G locking technology, enabling easy installation by clicking the tiles together. The Click floors are made from virgin vinyl with a rigid core. All floors in the collection have IXPE sound reducing backing, effectively controlling noise. The surface is treated with a strong ceramic coating resistant to wear and tear, scratching and water. They can be installed on an existing floor, making the Click floors ideal to use in renovation projects or when you want to retain the existing floor. Just like all our other Luxury Tiles floors, they are phthalate-free.

PRODUCT DETAILS

Article Number	LTCLS3101-457
Dimensions	457 x 914.4 mm
Weight per Package	24.7 kg
Area per Package	2.51 m ²
Area per pallet	100.4 m ²
Construction	Click 6 mm Impression

FACTS

Design	Stone design
Range	Luxury Tiles
Collection	Impression Stone Collection
Joint	Click5G
Floor heating	Yes

TECHNICAL PROPERTIES

Application	EN ISO 10874	23/33/42	
Effect of furniture leg	EN ISO 16581	No visible damage/Change	
Reaction To Fire	EN13501-1	Bfl-s1	
Thermal Resistance R-Value		0.035 (m2K/W)	
Residual indentation EN ISO 24343-1		< 0.2 mm (*with underlayment)	
Dimensional stability	EN ISO 23999	< 0.1 %	
Colour fastness	EN ISO 105-B02	≥ 6	
Slip resistance	EN 13893	DS (>0.3)	
Slip resistance	DIN 51130	R10	
Statcal electrical propensity	EN 1815	< 2 kV (antistatic)	
Scratch resistance	EN16094	Pass with good results	

Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.



12.02.2024
AB GUSTAF KÄHR | www.kahrs.com | © Kährs 2023



TALUNG CLS 457

The Kährs Luxury Tiles Click floors has been designed for home and public environments that require floors with adhesive-free installation that are both beautiful and tough. They come in a variety of wood and stone designs. Maximum durability and stability is achieved through the rigid core and the unique 5G locking technology, enabling easy installation by clicking the tiles together. The Click floors are made from virgin vinyl with a rigid core. All floors in the collection have IXPE sound reducing backing, effectively controlling noise. The surface is treated with a strong ceramic coating resistant to wear and tear, scratching and water. They can be installed on an existing floor, making the Click floors ideal to use in renovation projects or when you want to retain the existing floor. Just like all our other Luxury Tiles floors, they are phthalate-free.

PRODUCT DETAILS

Article Number	LTCLS3102-457
Dimensions	457 x 914.4 mm
Weight per Package	24.7 kg
Area per Package	2.51 m ²
Area per pallet	100.4 m ²
Construction	Click 6 mm Impression

FACTS

Design	Stone design
Range	Luxury Tiles
Collection	Impression Stone Collection
Joint	Click5G
Floor heating	Yes

TECHNICAL PROPERTIES

Application	EN ISO 10874	23/33/42	
Effect of furniture leg	EN ISO 16581	No visible damage/Change	
Reaction To Fire	EN13501-1	Bfl-s1	
Thermal Resistance R-Value		0.035 (m2K/W)	
Residual indentation EN ISO 24343-1		< 0.2 mm (*with underlayment)	
Dimensional stability	EN ISO 23999	< 0.1 %	
Colour fastness	EN ISO 105-B02	≥ 6	
Slip resistance	EN 13893	DS (>0.3)	
Slip resistance	DIN 51130	R10	
Statcal electrical propensity	EN 1815	< 2 kV (antistatic)	
Scratch resistance	EN16094	Pass with good results	

Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.



12.02.2024
AB GUSTAF KÄHR | www.kahrs.com | © Kährs 2023



ATHOS CLS 457

The Kährs Luxury Tiles Click floors have been designed for home and public environments that require floors with adhesive-free installation that are both beautiful and tough. They come in a variety of wood and stone designs. Maximum durability and stability is achieved through the rigid core and the unique 5G locking technology, enabling easy installation by clicking the tiles together. The Click floors are made from virgin vinyl with a rigid core. All floors in the collection have IXPE sound reducing backing, effectively controlling noise. The surface is treated with a strong ceramic coating resistant to wear and tear, scratching and water. They can be installed on an existing floor, making the Click floors ideal to use in renovation projects or when you want to retain the existing floor. Just like all our other Luxury Tiles floors, they are phthalate-free.

PRODUCT DETAILS

Article Number	LTCLS3103-457
Dimensions	457 x 914.4 mm
Weight per Package	24.7 kg
Area per Package	2.51 m ²
Area per pallet	100.4 m ²
Construction	Click 6 mm Impression

FACTS

Design	Stone design
Range	Luxury Tiles
Collection	Impression Stone Collection
Joint	Click5G
Floor heating	Yes

TECHNICAL PROPERTIES

Application	EN ISO 10874	23/33/42	
Effect of furniture leg	EN ISO 16581	No visible damage/Change	
Reaction To Fire	EN13501-1	Bfl-s1	
Thermal Resistance R-Value		0.035 (m2K/W)	
Residual indentation EN ISO 24343-1		< 0.2 mm (*with underlayment)	
Dimensional stability	EN ISO 23999	< 0.1 %	
Colour fastness	EN ISO 105-B02	≥ 6	
Slip resistance	EN 13893	DS (>0.3)	
Slip resistance	DIN 51130	R10	
Statical electrical propensity	EN 1815	< 2 kV (antistatic)	
Scratch resistance	EN16094	Pass with good results	

Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.



12.02.2024
AB GUSTAF KÄHR | www.kahrs.com | © Kährs 2023



OLYMPUS CLS 457

The Kährs Luxury Tiles Click floors has been designed for home and public environments that require floors with adhesive-free installation that are both beautiful and tough. They come in a variety of wood and stone designs. Maximum durability and stability is achieved through the rigid core and the unique 5G locking technology, enabling easy installation by clicking the tiles together. The Click floors are made from virgin vinyl with a rigid core. All floors in the collection have IXPE sound reducing backing, effectively controlling noise. The surface is treated with a strong ceramic coating resistant to wear and tear, scratching and water. They can be installed on an existing floor, making the Click floors ideal to use in renovation projects or when you want to retain the existing floor. Just like all our other Luxury Tiles floors, they are phthalate-free.

PRODUCT DETAILS

Article Number	LTCLS3104-457
Dimensions	457 x 914.4 mm
Weight per Package	24.7 kg
Area per Package	2.51 m ²
Area per pallet	100.4 m ²
Construction	Click 6 mm Impression

FACTS

Design	Stone design
Range	Luxury Tiles
Collection	Impression Stone Collection
Joint	Click5G
Floor heating	Yes

TECHNICAL PROPERTIES

Application	EN ISO 10874	23/33/42	
Effect of furniture leg	EN ISO 16581	No visible damage/Change	
Reaction To Fire	EN13501-1	Bfl-s1	
Thermal Resistance R-Value		0.035 (m2K/W)	
Residual indentation EN ISO 24343-1		< 0.2 mm (*with underlayment)	
Dimensional stability	EN ISO 23999	< 0.1 %	
Colour fastness	EN ISO 105-B02	≥ 6	
Slip resistance	EN 13893	DS (>0.3)	
Slip resistance	DIN 51130	R10	
Statical electrical propensity	EN 1815	< 2 kV (antistatic)	
Scratch resistance	EN16094	Pass with good results	

Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.



12.02.2024
AB GUSTAF KÄHR | www.kahrs.com | © Kährs 2023



AMARO CLS 457

The Kährs Luxury Tiles Click floors has been designed for home and public environments that require floors with adhesive-free installation that are both beautiful and tough. They come in a variety of wood and stone designs. Maximum durability and stability is achieved through the rigid core and the unique 5G locking technology, enabling easy installation by clicking the tiles together. The Click floors are made from virgin vinyl with a rigid core. All floors in the collection have IXPE sound reducing backing, effectively controlling noise. The surface is treated with a strong ceramic coating resistant to wear and tear, scratching and water. They can be installed on an existing floor, making the Click floors ideal to use in renovation projects or when you want to retain the existing floor. Just like all our other Luxury Tiles floors, they are phthalate-free.

PRODUCT DETAILS

Article Number	LTCLS3105-457
Dimensions	457 x 914.4 mm
Weight per Package	24.7 kg
Area per Package	2.51 m ²
Area per pallet	100.4 m ²
Construction	Click 6 mm Impression

FACTS

Design	Stone design
Range	Luxury Tiles
Collection	Impression Stone Collection
Joint	Click5G
Floor heating	Yes

TECHNICAL PROPERTIES

Application	EN ISO 10874	23/33/42	
Effect of furniture leg	EN ISO 16581	No visible damage/Change	
Reaction To Fire	EN13501-1	Bfl-s1	
Thermal Resistance R-Value		0.035 (m2K/W)	
Residual indentation EN ISO 24343-1		< 0.2 mm (*with underlayment)	
Dimensional stability	EN ISO 23999	< 0.1 %	
Colour fastness	EN ISO 105-B02	≥ 6	
Slip resistance	EN 13893	DS (>0.3)	
Slip resistance	DIN 51130	R10	
Statcal electrical propensity	EN 1815	< 2 kV (antistatic)	
Scratch resistance	EN16094	Pass with good results	

Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.



12.02.2024
AB GUSTAF KÄHR | www.kahrs.com | © Kährs 2023



ANETO CLS 457

The Kährs Luxury Tiles Click floors has been designed for home and public environments that require floors with adhesive-free installation that are both beautiful and tough. They come in a variety of wood and stone designs. Maximum durability and stability is achieved through the rigid core and the unique 5G locking technology, enabling easy installation by clicking the tiles together. The Click floors are made from virgin vinyl with a rigid core. All floors in the collection have IXPE sound reducing backing, effectively controlling noise. The surface is treated with a strong ceramic coating resistant to wear and tear, scratching and water. They can be installed on an existing floor, making the Click floors ideal to use in renovation projects or when you want to retain the existing floor. Just like all our other Luxury Tiles floors, they are phthalate-free.

PRODUCT DETAILS

Article Number	LTCLS3106-457
Dimensions	457 x 914.4 mm
Weight per Package	24.7 kg
Area per Package	2.51 m ²
Area per pallet	100.4 m ²
Construction	Click 6 mm Impression

FACTS

Design	Stone design
Range	Luxury Tiles
Collection	Impression Stone Collection
Joint	Click5G
Floor heating	Yes

TECHNICAL PROPERTIES

Application	EN ISO 10874	23/33/42	
Effect of furniture leg	EN ISO 16581	No visible damage/Change	
Reaction To Fire	EN13501-1	Bfl-s1	
Thermal Resistance R-Value		0.035 (m2K/W)	
Residual indentation EN ISO 24343-1		< 0.2 mm (*with underlayment)	
Dimensional stability	EN ISO 23999	< 0.1 %	
Colour fastness	EN ISO 105-B02	≥ 6	
Slip resistance	EN 13893	DS (>0.3)	
Slip resistance	DIN 51130	R10	
Statcal electrical propensity	EN 1815	< 2 kV (antistatic)	
Scratch resistance	EN16094	Pass with good results	

Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.



12.02.2024
AB GUSTAF KÄHR | www.kahrs.com | © Kährs 2023



DOVECOT CLW 218

The Kährs Luxury Tiles Click floors has been designed for home and public environments that require floors with adhesive-free installation that are both beautiful and tough. They come in a variety of wood and stone designs. Maximum durability and stability is achieved through the rigid core and the unique 5G locking technology, enabling easy installation by clicking the tiles together. The Click floors are made from virgin vinyl with a rigid core. All floors in the collection have IXPE sound reducing backing, effectively controlling noise. The surface is treated with a strong ceramic coating resistant to wear and tear, scratching and water. They can be installed on an existing floor, making the Click floors ideal to use in renovation projects or when you want to retain the existing floor. Just like all our other Luxury Tiles floors, they are phthalate-free.

PRODUCT DETAILS

Article Number	LTCLW2201-218
Dimensions	220 x 1829 mm
Area per pallet	109.5 m ²
Construction	Click 6 mm Impression

FACTS

Design	Wood design
Range	Luxury Tiles
Collection	Impression Wood Collection
Joint	Click5G
Floor heating	Yes
Thickness	6 mm
Installation method	Floating

TECHNICAL PROPERTIES

Application	EN ISO 10874	23/33/42	
Effect of furniture leg	EN ISO 16581	No visible damage/Change	
Reaction To Fire	EN13501-1	Bfl-s1	
Thermal Resistance R-Value		0.035 (m2K/W)	
Residual indentation EN ISO 24343-1		< 0.2 mm (*with underlayment)	
Dimensional stability	EN ISO 23999	< 0.1 %	
Colour fastness	EN ISO 105-B02	≥ 6	
Slip resistance	EN 13893	DS (>0.3)	
Slip resistance	DIN 51130	R10	
Statcal electrical propensity	EN 1815	< 2 kV (antistatic)	
Scratch resistance	EN16094	Pass with good results	

Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.



12.02.2024
AB GUSTAF KÄHR | www.kahrs.com | © Kährs 2023



SPREEWALD CLW 218

The Kährs Luxury Tiles Click floors has been designed for home and public environments that require floors with adhesive-free installation that are both beautiful and tough. They come in a variety of wood and stone designs. Maximum durability and stability is achieved through the rigid core and the unique 5G locking technology, enabling easy installation by clicking the tiles together. The Click floors are made from virgin vinyl with a rigid core. All floors in the collection have IXPE sound reducing backing, effectively controlling noise. The surface is treated with a strong ceramic coating resistant to wear and tear, scratching and water. They can be installed on an existing floor, making the Click floors ideal to use in renovation projects or when you want to retain the existing floor. Just like all our other Luxury Tiles floors, they are phthalate-free.

PRODUCT DETAILS

Article Number	LTCLW2202-218
Dimensions	220 x 1829 mm
Weight per Package	15.9 kg
Area per Package	1.61 m ²
Area per pallet	109.5 m ²
Construction	Click 6 mm Impression

FACTS

Design	Wood design
Range	Luxury Tiles
Collection	Impression Wood Collection
Joint	Click5G
Floor heating	Yes

TECHNICAL PROPERTIES

Application	EN ISO 10874	23/33/42	
Effect of furniture leg	EN ISO 16581	No visible damage/Change	
Reaction To Fire	EN13501-1	Bfl-s1	
Thermal Resistance R-Value		0.035 (m2K/W)	
Residual indentation EN ISO 24343-1		< 0.2 mm (*with underlayment)	
Dimensional stability	EN ISO 23999	< 0.1 %	
Colour fastness	EN ISO 105-B02	≥ 6	
Slip resistance	EN 13893	DS (>0.3)	
Slip resistance	DIN 51130	R10	
Statcal electrical propensity	EN 1815	< 2 kV (antistatic)	
Scratch resistance	EN16094	Pass with good results	

Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.

12.02.2024
AB GUSTAF KÄHR | www.kahrs.com | © Kährs 2023



BALMORAL CLW 218

The Kährs Luxury Tiles Click floors has been designed for home and public environments that require floors with adhesive-free installation that are both beautiful and tough. They come in a variety of wood and stone designs. Maximum durability and stability is achieved through the rigid core and the unique 5G locking technology, enabling easy installation by clicking the tiles together. The Click floors are made from virgin vinyl with a rigid core. All floors in the collection have IXPE sound reducing backing, effectively controlling noise. The surface is treated with a strong ceramic coating resistant to wear and tear, scratching and water. They can be installed on an existing floor, making the Click floors ideal to use in renovation projects or when you want to retain the existing floor. Just like all our other Luxury Tiles floors, they are phthalate-free.

PRODUCT DETAILS

Article Number	LTCLW2203-218
Dimensions	220 x 1829 mm
Weight per Package	15.9 kg
Area per Package	1.61 m ²
Area per pallet	109.5 m ²
Construction	Click 6 mm Impression

FACTS

Design	Wood design
Range	Luxury Tiles
Collection	Impression Wood Collection
Joint	Click5G
Floor heating	Yes

TECHNICAL PROPERTIES

Application	EN ISO 10874	23/33/42	
Effect of furniture leg	EN ISO 16581	No visible damage/Change	
Reaction To Fire	EN13501-1	Bfl-s1	
Thermal Resistance R-Value		0.035 (m2K/W)	
Residual indentation EN ISO 24343-1		< 0.2 mm (*with underlayment)	
Dimensional stability	EN ISO 23999	< 0.1 %	
Colour fastness	EN ISO 105-B02	≥ 6	
Slip resistance	EN 13893	DS (>0.3)	
Slip resistance	DIN 51130	R10	
Statical electrical propensity	EN 1815	< 2 kV (antistatic)	
Scratch resistance	EN16094	Pass with good results	

Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.

12.02.2024
AB GUSTAF KÄHR | www.kahrs.com | © Kährs 2023



FOXALL CLW 218

"Kährs Luxury Tiles Impression FOXALL. Gulv med tresdesign i klassiske lyse toner forsterker lyset og skaper en fin balanse mellom innsiden og utsiden. Verken støvler eller skarpe klør setter noen varige spor. Det kan ta århundrer, til og med årtusener, for naturen å skape de vakre uttrykkene vi ser i materialer som tre og stein. Kvistene, sprekker og strukturen avslører hemmeligheter fra materialets fortid og skaper unike funksjoner som harmonerer perfekt med vår menneskelige ånd. Med inntrykk vi har valgt en samling med vakre, naturlige tre- og steinkonstruksjoner nøye og gjenskapt dem med nøye oppmerksomhet til hver eneste detalj. Fra varm, innbydende eik til elegant, tidløs granitt. For inntrykk som varer livet ut."

PRODUCT DETAILS

Article Number	LTCLW2204-218
Dimensions	220 x 1829 mm
Weight per Package	15.9 kg
Area per Package	1.61 m ²
Area per pallet	109.5 m ²
Construction	Click 6 mm Impression

FACTS

Design	Wood design
Range	Luxury Tiles
Collection	Impression Wood Collection
Joint	Click5G
Floor heating	Yes

TECHNICAL PROPERTIES

Application	EN ISO 10874	23/33/42	
Effect of furniture leg	EN ISO 16581	No visible damage/Change	
Reaction To Fire	EN13501-1	Bfl-s1	
Thermal Resistance R-Value		0.035 (m2K/W)	
Residual indentation EN ISO 24343-1		< 0.2 mm (*with underlayment)	
Dimensional stability	EN ISO 23999	< 0.1 %	
Colour fastness	EN ISO 105-B02	≥ 6	
Slip resistance	EN 13893	DS (>0.3)	
Slip resistance	DIN 51130	R10	
Statical electrical propensity	EN 1815	< 2 kV (antistatic)	
Scratch resistance	EN16094	Pass with good results	

Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.

12.02.2024
AB GUSTAF KÄHR | www.kahrs.com | © Kährs 2023

1



SAHAM CLW 218

The Kährs Luxury Tiles Click floors has been designed for home and public environments that require floors with adhesive-free installation that are both beautiful and tough. They come in a variety of wood and stone designs. Maximum durability and stability is achieved through the rigid core and the unique 5G locking technology, enabling easy installation by clicking the tiles together. The Click floors are made from virgin vinyl with a rigid core. All floors in the collection have IXPE sound reducing backing, effectively controlling noise. The surface is treated with a strong ceramic coating resistant to wear and tear, scratching and water. They can be installed on an existing floor, making the Click floors ideal to use in renovation projects or when you want to retain the existing floor. Just like all our other Luxury Tiles floors, they are phthalate-free.

PRODUCT DETAILS

Article Number	LTCLW2205-218
Dimensions	220 x 1829 mm
Weight per Package	15.9 kg
Area per Package	1.61 m ²
Area per pallet	109.5 m ²
Construction	Click 6 mm Impression

FACTS

Design	Wood design
Range	Luxury Tiles
Collection	Impression Wood Collection
Joint	Click5G
Floor heating	Yes

TECHNICAL PROPERTIES

Application	EN ISO 10874	23/33/42	
Effect of furniture leg	EN ISO 16581	No visible damage/Change	
Reaction To Fire	EN13501-1	Bfl-s1	
Thermal Resistance R-Value		0.035 (m2K/W)	
Residual indentation EN ISO 24343-1		< 0.2 mm (*with underlayment)	
Dimensional stability	EN ISO 23999	< 0.1 %	
Colour fastness	EN ISO 105-B02	≥ 6	
Slip resistance	EN 13893	DS (>0.3)	
Slip resistance	DIN 51130	R10	
Statical electrical propensity	EN 1815	< 2 kV (antistatic)	
Scratch resistance	EN16094	Pass with good results	

Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.

12.02.2024
AB GUSTAF KÄHR | www.kahrs.com | © Kährs 2023

1



KELHAM CLW 218

The Kährs Luxury Tiles Click floors has been designed for home and public environments that require floors with adhesive-free installation that are both beautiful and tough. They come in a variety of wood and stone designs. Maximum durability and stability is achieved through the rigid core and the unique 5G locking technology, enabling easy installation by clicking the tiles together. The Click floors are made from virgin vinyl with a rigid core. All floors in the collection have IXPE sound reducing backing, effectively controlling noise. The surface is treated with a strong ceramic coating resistant to wear and tear, scratching and water. They can be installed on an existing floor, making the Click floors ideal to use in renovation projects or when you want to retain the existing floor. Just like all our other Luxury Tiles floors, they are phthalate-free.

PRODUCT DETAILS

Article Number	LTCLW2206-218
Dimensions	220 x 1829 mm
Weight per Package	15.9 kg
Area per Package	1.61 m ²
Area per pallet	109.5 m ²
Construction	Click 6 mm Impression

FACTS

Design	Wood design
Range	Luxury Tiles
Collection	Impression Wood Collection
Joint	Click5G
Floor heating	Yes

TECHNICAL PROPERTIES


Application	EN ISO 10874	23/33/42	
Effect of furniture leg	EN ISO 16581	No visible damage/Change	
Reaction To Fire	EN13501-1	Bfl-s1	
Thermal Resistance R-Value		0.035 (m2K/W)	
Residual indentation EN ISO 24343-1		< 0.2 mm (*with underlayment)	
Dimensional stability	EN ISO 23999	< 0.1 %	
Colour fastness	EN ISO 105-B02	≥ 6	
Slip resistance	EN 13893	DS (>0.3)	
Slip resistance	DIN 51130	R10	
Statcal electrical propensity	EN 1815	< 2 kV (antistatic)	
Scratch resistance	EN16094	Pass with good results	

Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.

12.02.2024
AB GUSTAF KÄHR | www.kahrs.com | © Kährs 2023

1

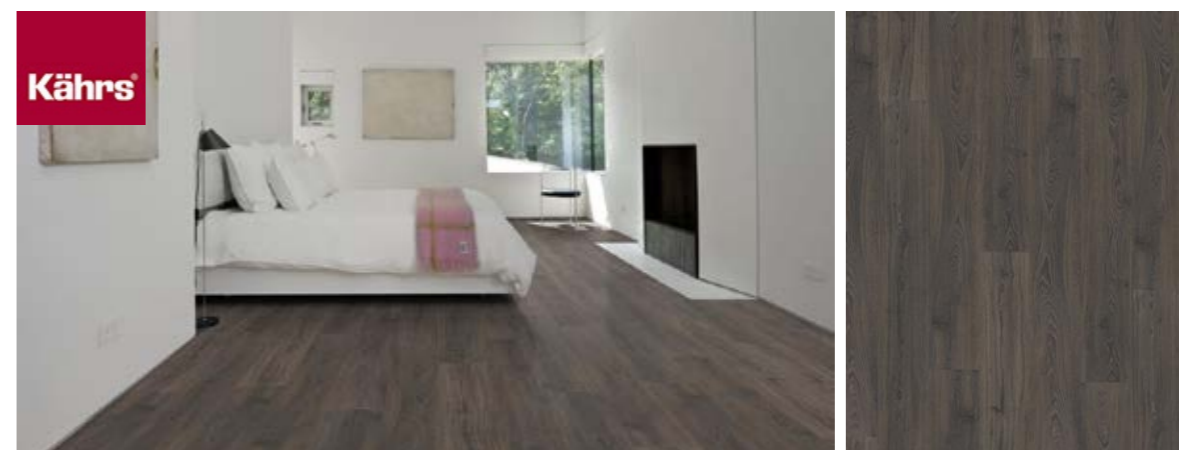

ODENWALD CLW 218

The Kährs Luxury Tiles Click floors has been designed for home and public environments that require floors with adhesive-free installation that are both beautiful and tough. They come in a variety of wood and stone designs. Maximum durability and stability is achieved through the rigid core and the unique 5G locking technology, enabling easy installation by clicking the tiles together. The Click floors are made from virgin vinyl with a rigid core. All floors in the collection have IXPE sound reducing backing, effectively controlling noise. The surface is treated with a strong ceramic coating resistant to wear and tear, scratching and water. They can be installed on an existing floor, making the Click floors ideal to use in renovation projects or when you want to retain the existing floor. Just like all our other Luxury Tiles floors, they are phthalate-free.

PRODUCT DETAILS

Article Number	LTCLW2207-218
Dimensions	220 x 1829 mm
Weight per Package	15.9 kg
Area per Package	1.61 m ²
Area per pallet	109.5 m ²
Construction	Click 6 mm Impression

FACTS

Design	Wood design
Range	Luxury Tiles
Collection	Impression Wood Collection
Joint	Click5G
Floor heating	Yes

TECHNICAL PROPERTIES

Application	EN ISO 10874	23/33/42	
Effect of furniture leg	EN ISO 16581	No visible damage/Change	
Reaction To Fire	EN13501-1	Bfl-s1	
Thermal Resistance R-Value		0.035 (m2K/W)	
Residual indentation EN ISO 24343-1		< 0.2 mm (*with underlayment)	
Dimensional stability	EN ISO 23999	< 0.1 %	
Colour fastness	EN ISO 105-B02	≥ 6	
Slip resistance	EN 13893	DS (>0.3)	
Slip resistance	DIN 51130	R10	
Statical electrical propensity	EN 1815	< 2 kV (antistatic)	
Scratch resistance	EN16094	Pass with good results	

Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.

12.02.2024
AB GUSTAF KÄHR | www.kahrs.com | © Kährs 2023



LAPONIA CLW 218

The Kährs Luxury Tiles Click floors has been designed for home and public environments that require floors with adhesive-free installation that are both beautiful and tough. They come in a variety of wood and stone designs. Maximum durability and stability is achieved through the rigid core and the unique 5G locking technology, enabling easy installation by clicking the tiles together. The Click floors are made from virgin vinyl with a rigid core. All floors in the collection have IXPE sound reducing backing, effectively controlling noise. The surface is treated with a strong ceramic coating resistant to wear and tear, scratching and water. They can be installed on an existing floor, making the Click floors ideal to use in renovation projects or when you want to retain the existing floor. Just like all our other Luxury Tiles floors, they are phthalate-free.

PRODUCT DETAILS

Article Number	LTCLW2208-218
Dimensions	220 x 1829 mm
Weight per Package	15.9 kg
Area per Package	1.61 m ²
Area per pallet	109.5 m ²
Construction	Click 6 mm Impression

FACTS

Design	Wood design
Range	Luxury Tiles
Collection	Impression Wood Collection
Joint	Click5G
Floor heating	Yes

TECHNICAL PROPERTIES

Application	EN ISO 10874	23/33/42	
Effect of furniture leg	EN ISO 16581	No visible damage/Change	
Reaction To Fire	EN13501-1	Bfl-s1	
Thermal Resistance R-Value		0.035 (m2K/W)	
Residual indentation EN ISO 24343-1		< 0.2 mm (*with underlayment)	
Dimensional stability	EN ISO 23999	< 0.1 %	
Colour fastness	EN ISO 105-B02	≥ 6	
Slip resistance	EN 13893	DS (>0.3)	
Slip resistance	DIN 51130	R10	
Statical electrical propensity	EN 1815	< 2 kV (antistatic)	
Scratch resistance	EN16094	Pass with good results	

Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.

12.02.2024
AB GUSTAF KÄHR | www.kahrs.com | © Kährs 2023

1



Nordic Classic Collection

In a wide range of nine grounded colors, the Nordic Classic Collection reflects the diverse landscape of the north. The shades and nuances have gathered their inspiration from the light dunes, long coastlines, deep forests, and high mountains found in the northern landscapes of Scandinavia.

Through synchrone embossing, we have created a dynamic design which enhances the feeling of a rustic and lifelike structure of the floor. Obvious graining, cracks, and knots are skillfully reproduced in the one-strip plank, and the effect is salient.

The Nordic Classic Collection feels true to nature and offers excellent versatility which fit all contrasts of life.

All floors in the collection have IXPE sound reducing backing, effectively controlling noise.

The surface is treated with a strong ceramic coating resistant to wear and tear, scratching and water.

Just like all our other Luxury Tiles floors, they are phthalate-free.



IRATI CLW 218

Kährs Luxury Tiles Click floor Irati with its creamy white and greyish hues has been inspired by sandy dunes and fresh morning. Irati is a floor that brings warmth and brightness to any space. Cracks and knots are skilfully designed and enhanced by synchro embossing to create a realistic rustic wood look.

PRODUCT DETAILS		FACTS		TECHNICAL PROPERTIES		
Article Number	LTCLW2301-218	Design	Wood design	Application	EN ISO 23/33/42 10874	
Dimensions	218 x 1210 mm	Range	Luxury Tiles	Effect of furniture leg	EN ISO 16581 No visible damage/Change	
Weight per Package	20.6 kg	Collection	Nordic Classic Collection	Reaction To Fire	EN13501- Bfl-s1 1	
Area per Package	2.1 m ²	Joint	Click5G	Thermal Resistance R-Value	0.035 (m2K/W)	
Area per pallet	84.4 m ²	Floor heating	Yes	Residual indentation EN ISO 24343-1	< 0.2 mm (*with underlayment)	
Construction	Click 6 mm	Warranty	30 years residential/15 years commercial	Dimensional stability	EN ISO 23999 < 0.1 %	
DETAIL DESCRIPTION		Backside material	IXPE Sound reducing backing	Colour fastness	EN ISO 105-B02 ≥ 6	
For adhesive-free installation in homes and public spaces. Maximum durability and stability through the rigid core and the unique 5G locking system, enabling easy installation by clicking the tiles together. Made from virgin vinyl, they are phthalate-free and have IXPE sound reducing backing, effectively controlling noise. Surface treated with a strong ceramic coating resistant to wear, scratching and water. Can be installed on an existing floor, ideal for renovation projects.		Thickness	6 mm	Slip resistance	EN 13893 DS (>0.3)	
		Installation method	Floating	Slip resistance	DIN 51130 R10	
				Statical electrical propensity	EN 1815 < 2 kV (antistatic)	
				Scratch resistance	EN16094 Pass with good results	

Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.



12.02.2024
AB GUSTAF KÄHR | www.kahrs.com | © Kährs 2023



AKKELIS CLW 218

Kährs Luxury Tiles Click floor Akkelis has rich shades of brown and subtle tones of gold and amber, Akkelis is a characterful wood design floor with a warm impression. The rustical wood graining, knots and cracks are enhanced by synchronic embossing for a truly authentic wood look.

PRODUCT DETAILS		FACTS		TECHNICAL PROPERTIES		
Article Number	LTCLW2305-218	Design	Wood design	Application	EN ISO 23/33/42 10874	
Dimensions	218 x 1210 mm	Range	Luxury Tiles	Effect of furniture leg	EN ISO 16581 No visible damage/Change	
Weight per Package	20.6 kg	Collection	Nordic Classic Collection	Reaction To Fire	EN13501- Bfl-s1 1	
Area per Package	2.1 m ²	Joint	Click5G	Thermal Resistance R-Value	0.035 (m2K/W)	
Area per pallet	84.4 m ²	Floor heating	Yes	Residual indentation EN ISO 24343-1	< 0.2 mm (*with underlayment)	
Construction	Click 6 mm	Warranty	30 years residential/15 years commercial	Dimensional stability	EN ISO 23999 < 0.1 %	
DETAIL DESCRIPTION		Thickness	6 mm	Colour fastness	EN ISO 105-B02 ≥ 6	
For adhesive-free installation in homes and public spaces. Maximum durability and stability through the rigid core and the unique 5G locking system, enabling easy installation by clicking the tiles together. Made from virgin vinyl, they are phthalate-free and have IXPE sound reducing backing, effectively controlling noise. Surface treated with a strong ceramic coating resistant to wear, scratching and water. Can be installed on an existing floor, ideal for renovation projects.		Installation method	Floating	Slip resistance	EN 13893 DS (>0.3)	
				Slip resistance	DIN 51130 R10	
				Statical electrical propensity	EN 1815 < 2 kV (antistatic)	
				Scratch resistance	EN16094 Pass with good results	

Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.



12.02.2024
AB GUSTAF KÄHR | www.kahrs.com | © Kährs 2023



BLAIKEN CLW 218

Kährs Luxury Tiles Click floor Blaiken has a combination of light and warm natural tones, inspired by the colours of dried lyme grass, give this floor a characterful rustic wood appearance. The realistic wood grain, knots and cracks are enhanced by synchrone embossing, for a truly authentic wood look and feel.

PRODUCT DETAILS		FACTS		TECHNICAL PROPERTIES		
Article Number	LTCLW2303-218	Design	Wood design	Application	EN ISO 23/33/42 10874	
Dimensions	218 x 1210 mm	Range	Luxury Tiles	Effect of furniture leg	EN ISO 16581 No visible damage/Change	
Weight per Package	20.6 kg	Collection	Nordic Classic Collection	Reaction To Fire	EN13501- Bfl-s1 1	
Area per Package	2.1 m ²	Joint	Click5G	Thermal Resistance R-Value	0.035 (m2K/W)	
Area per pallet	84.4 m ²	Floor heating	Yes	Residual indentation EN ISO 24343-1	< 0.2 mm (*with underlayment)	
Construction	Click 6 mm	Warranty	30 years residential/15 years commercial	Dimensional stability	EN ISO 23999 < 0.1 %	
DETAIL DESCRIPTION		Backside material	IXPE Sound reducing backing	Colour fastness	EN ISO 105-B02 ≥ 6	
For adhesive-free installation in homes and public spaces. Maximum durability and stability through the rigid core and the unique 5G locking system, enabling easy installation by clicking the tiles together. Made from virgin vinyl, they are phthalate-free and have IXPE sound reducing backing, effectively controlling noise. Surface treated with a strong ceramic coating resistant to wear, scratching and water. Can be installed on an existing floor, ideal for renovation projects.		Thickness	6 mm	Slip resistance	EN 13893 DS (>0.3)	
		Installation method	Floating	Slip resistance	DIN 51130 R10	
				Statical electrical propensity	EN 1815 < 2 kV (antistatic)	
				Scratch resistance	EN16094 Pass with good results	

Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.



12.02.2024
AB GUSTAF KÄHR | www.kahrs.com | © Kährs 2023



KILSBERGEN CLW 218

Kährs Luxury Tiles Click floor Kilsbergen has a light natural oak design, softened by a transparent white stain, resulting in a timeless floor that complements any interior. The natural oak colour, wood grain and visible knots and cracks create an authentic look, enhanced by synchrone embossing.

PRODUCT DETAILS

Article Number	LTCLW2302-218
Dimensions	218 x 1210 mm
Weight per Package	20.6 kg
Area per Package	2.1 m ²
Area per pallet	84.4 m ²
Construction	Click 6 mm

DETAIL DESCRIPTION

For adhesive-free installation in homes and public spaces. Maximum durability and stability through the rigid core and the unique 5G locking system, enabling easy installation by clicking the tiles together. Made from virgin vinyl, they are phthalate-free and have IXPE sound reducing backing, effectively controlling noise. Surface treated with a strong ceramic coating resistant to wear, scratching and water. Can be installed on an existing floor, ideal for renovation projects.

FACTS

Design	Wood design
Range	Luxury Tiles
Collection	Nordic Classic Collection
Warranty	30 years residential/15 years commercial

TECHNICAL PROPERTIES

Application	EN ISO 10874	23/33/42	
Effect of furniture leg	EN ISO 16581	No visible damage/Change	
Reaction To Fire	EN13501-1	Bfl-s1	
Thermal Resistance R-Value		0.035 (m2K/W)	
Residual indentation EN ISO 24343-1		< 0.2 mm (*with underlayment)	
Dimensional stability	EN ISO 23999	< 0.1 %	
Colour fastness	EN ISO 105-B02	≥ 6	
Slip resistance	EN 13893	DS (>0.3)	
Slip resistance	DIN 51130	R10	
Statical electrical propensity	EN 1815	< 2 kV (antistatic)	
Scratch resistance	EN16094	Pass with good results	

Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.



12.02.2024
AB GUSTAF KÄHR | www.kahrs.com | © Kährs 2023



OTAGO CLW 218

Kährs Luxury Tiles Click floor Otago with its light tones of grey and shades of creamy white and silver was inspired by the beauty of fog rising on a cold morning. The timeless colours of the floor are complemented by a rustic, natural wood design. Skilfully designed knots and cracks are enhanced by synchrone embossing for an authentic look and feel.

PRODUCT DETAILS		FACTS		TECHNICAL PROPERTIES		
Article Number	LTCLW2308-218	Design	Wood design	Application	EN ISO 23/33/42 10874	
Dimensions	218 x 1210 mm	Range	Luxury Tiles	Effect of furniture leg	EN ISO 16581	No visible damage/Change
Weight per Package	20.6 kg	Collection	Nordic Classic Collection	Reaction To Fire	EN13501-1	Bfl-s1
Area per Package	2.1 m ²	Joint	Click5G	Thermal Resistance R-Value	0.035 (m2K/W)	
Area per pallet	84.4 m ²	Floor heating	Yes	Residual indentation EN ISO 24343-1	< 0.2 mm (*with underlayment)	
Construction	Click 6 mm	Warranty	30 years residential/15 years commercial	Dimensional stability	EN ISO 23999	< 0.1 %
DETAIL DESCRIPTION		Thickness	6 mm	Colour fastness	EN ISO 105-B02	≥ 6
For adhesive-free installation in homes and public spaces. Maximum durability and stability through the rigid core and the unique 5G locking system, enabling easy installation by clicking the tiles together. Made from virgin vinyl, they are phthalate-free and have IXPE sound reducing backing, effectively controlling noise. Surface treated with a strong ceramic coating resistant to wear, scratching and water. Can be installed on an existing floor, ideal for renovation projects.		Installation method	Floating	Slip resistance	EN 13893 DS (>0.3)	
				Slip resistance	DIN 51130	R10
				Statical electrical propensity	EN 1815	< 2 kV (antistatic)
				Scratch resistance	EN16094	Pass with good results

Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.



12.02.2024
AB GUSTAF KÄHR | www.kahrs.com | © Kährs 2023



DIDNOK CLW 218

Kährs Luxury Tiles Click floor Didnok with deep dark shades of grey and a rustic wood appearance is a true statement floor that perfectly complements any interior. A realistic wood grain and authentic knots and cracks give the floor an expressive impression. The skilfully created wood appearance is enhanced by synchrone embossing for a natural look and feel.

PRODUCT DETAILS

Article Number	LTCLW2309-218
Dimensions	218 x 1210 mm
Weight per Package	20.6 kg
Area per Package	2.1 m ²
Area per pallet	84.4 m ²
Construction	Click 6 mm

DETAIL DESCRIPTION

For adhesive-free installation in homes and public spaces. Maximum durability and stability through the rigid core and the unique 5G locking system, enabling easy installation by clicking the tiles together. Made from virgin vinyl, they are phthalate-free and have IXPE sound reducing backing, effectively controlling noise. Surface treated with a strong ceramic coating resistant to wear, scratching and water. Can be installed on an existing floor, ideal for renovation projects.

FACTS

Design	Wood design
Collection	Nordic Classic Collection
Warranty	30 years residential/15 years commercial
Thickness	6 mm

TECHNICAL PROPERTIES

Application	EN ISO 10874	23/33/42	
Effect of furniture leg	EN ISO 16581	No visible damage/Change	
Reaction To Fire	EN13501-1	Bfl-s1	
Thermal Resistance R-Value		0.035 (m2K/W)	
Residual indentation EN ISO 24343-1		< 0.2 mm (*with underlayment)	
Dimensional stability	EN ISO 23999	< 0.1 %	
Colour fastness	EN ISO 105-B02	≥ 6	
Slip resistance	EN 13893	DS (>0.3)	
Slip resistance	DIN 51130	R10	
Statical electrical propensity	EN 1815	< 2 kV (antistatic)	
Scratch resistance	EN16094	Pass with good results	

Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.




12.02.2024
AB GUSTAF KÄHR | www.kahrs.com | © Kährs 2023



orchard
timber products

Part of National Timber Group

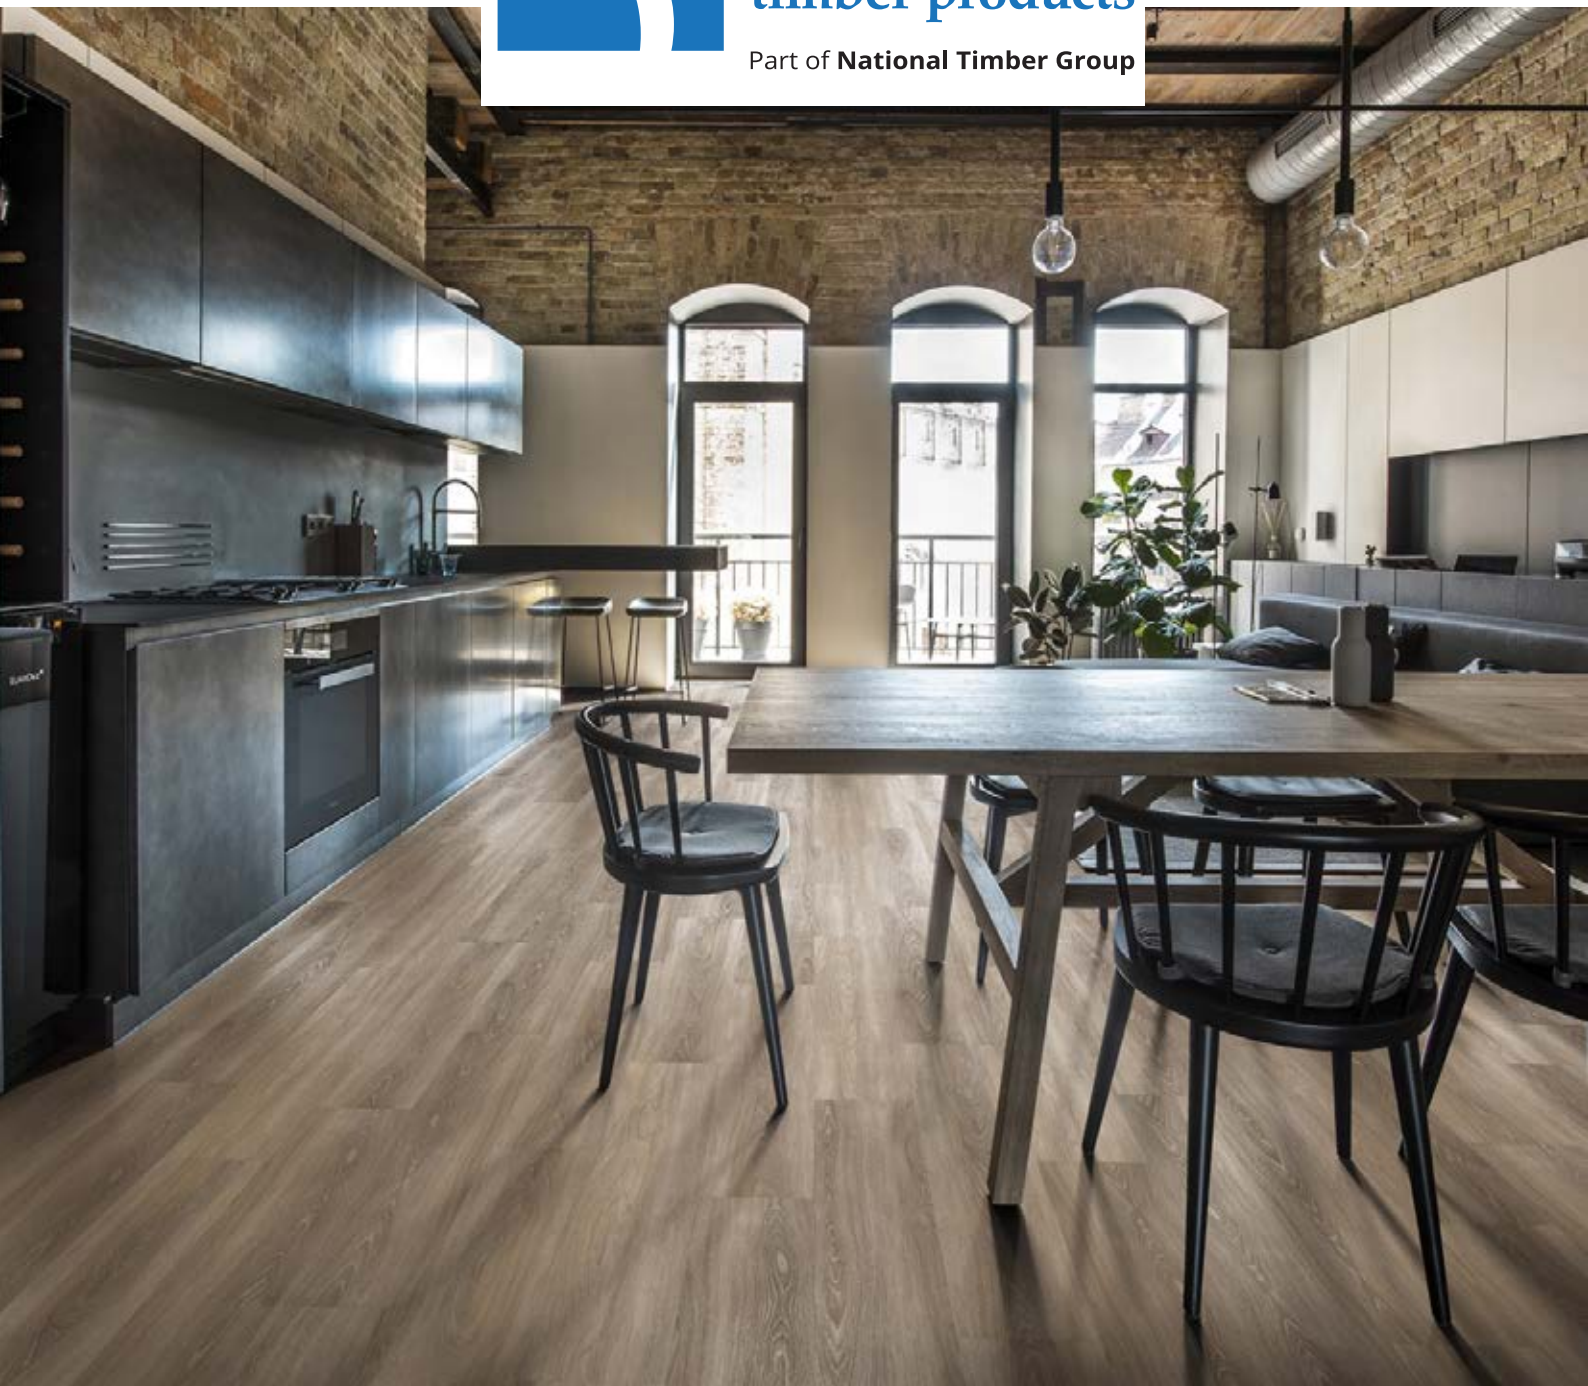

Kährs®